



Olsys Street

Versatile and sober street lantern employing a state-of-the-art LED engine for performance and efficiency

- State-of-the-art LED engine in line with EN13201 and European recommendations (ULOR 0%, above 70lm/W in 4000K) to cover projects up to ME3
- Complete with power reduction to reduce energy consumption during the night
- Exceptionally low cost of ownership with an optimised heat management system to provide a lifetime up to 80,000 hours (L70, 25°) without dimming
- Discreet design is coordinated with Olsys Area luminaires and available with a wide choice of mounting types and column packages



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

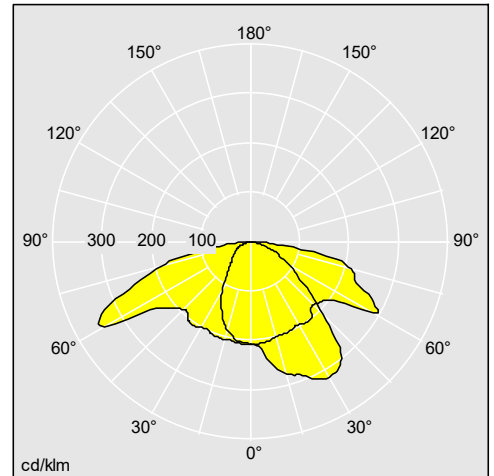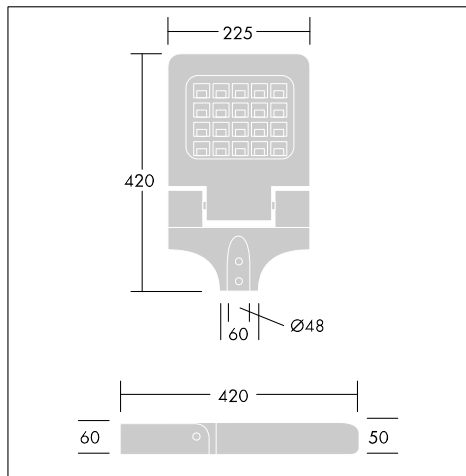

96274078

Material/Finish

Body: die-cast aluminium (AS9U), standard corrosion class: C3,
 powder coated silver grey 9006 finish
 Enclosure: size 1 clear UV stabilised PC
 size 2: tempered glass
 Optics: size 1 PC, size 2 micro reflectors in highly reflective anodised aluminium
 Screws: stainless steel
 Brackets and mounting accessories: aluminium

Installation/Mounting

Fitting and mounting accessories delivered separately.
 Product supplied pre-wired with connector
 Recommended mounting heights:
 Olsys Street 1: 4m
 Olsys Street 2 : 6 to 8m
 Coordinated columns and brackets: cylindro-conical or curved
 Access to gear (replaceable) via 4 screws from the canopy
 Suitable for ambient temperature range -30 to 50°C

Specification

To specify state:
 IP66 LED street lantern with 24/45/70/90W (up to 7000lm) LED packages, powder coated silver grey 9006, integrated dimming system and coordinated decorative columns and brackets.
 As Thorn Olsys Street.

Olsys Street

Ordering Guide To order a complete fitting, please select a luminaire, a mounting attachment and a column when relevant. Complete with LEDs.

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Olsys 1 street				
OLSYS1 12L70 740 CL1 BP5 STR	LED		2,9	96633536
OLSYS1 12L70 730 CL1 BP5 STR	LED		2,9	96633538
Olsys 1 street, mounting accessories				
<OLSYS1 MLE 60MA			1,2	96262297
OLSYS1 MTP 60/76			1,4	96262298
OLSYS1 MTP 60/76 x2			2,1	96262299
OLSYS1 BRA 500MM MTP			3,9	96262300
OLSYS1 BRx2 1000MM MTP			6,9	96262301
OLSYS1 MLE 47MA			1	96262302
Olsys 2 street				
OLSYS2 36L70 740 CL1 BP8 STR	LED		8,75	96633548
OLSYS2 36L70 730 CL1 BP8 STR	LED		8,75	96633550
Olsys 2 street, mounting accessories				
OLSYS2 BRA 500MM MTP			5,3	96262306
OLSYS2 BRx2 1000MM MTP			10	96262307
OLSYS2 MLE 47MA			2,5	96262308
OLSYS2 MLE 60MA			2,6	96262303
OLSYS2 MTP 60/76			2,9	96262304
OLSYS2 MTP 60/76 x2			5	96262305
OLSYS2 MWA STR			0,6	96267967