



## <AquaForce II LED

**A range of IP65 rated LED luminaires for high quality low energy lighting in wet and dusty environments**

- Installation features include quick fix with Connect options, through wiring and BESA box compatibility (600mm spacing)
- Highly efficient LEDs reduce energy consumption and costs, and provide further savings arising from longer maintenance lifecycles (50,000 hours @L70, Ta 25°C)
- Choice of emergency lighting and DALI dimming control
- The traditional design gives an aesthetically pleasing appearance - ideal for point for point replacement on refurbishment projects



*Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.*

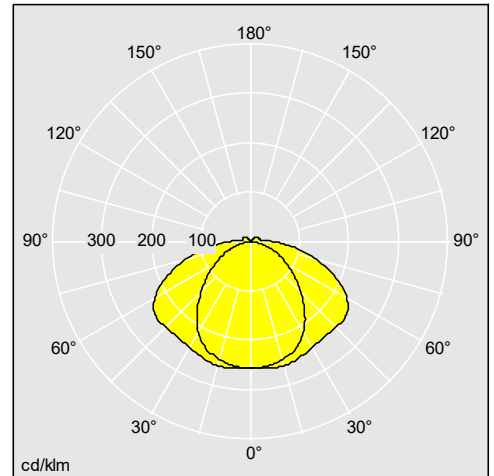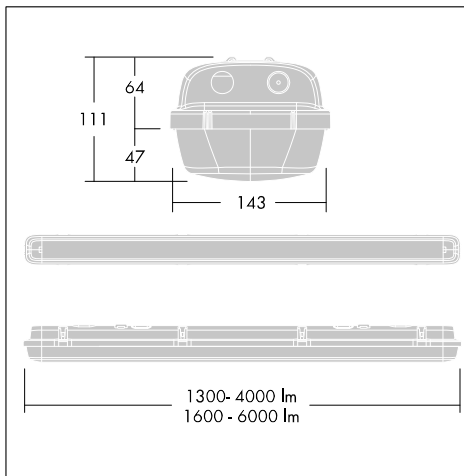

96241871

### Material/Finish

Canopy: polycarbonate  
 Diffuser: polycarbonate with linear prisms  
 Gasket: expanded polyurethane  
 Toggles: stainless steel  
 Gear tray: steel, white enamelled finish

### Installation/Mounting

Cable entry positions at the back and each end of the fitting. Supplied with IP65 grommet. Stainless steel quick fix brackets supplied with each luminaire. Stainless steel toggles are captive in the canopy to prevent loss during maintenance. Steel gear tray is retained and suspended by spring latches. Conduit mounting, chain suspension and catenary suspension kits are all available as accessories. Suitable for all indoor applications plus external under cover only applications.

### Specification

To specify state:

High performance LED IP65, dust and moisture resistant luminaire with polycarbonate canopy, polycarbonate diffusers and steel toggles, 4300/6400 lumens options, Ra80, 4000K, long service life of 50,000 hours at 70% light output (L70).

As Thorn Aquaforce II LED