



## FleXity

### Tiny post-top lantern offering comfort and performance

- Available with opal diffuser for comfortable lighting or clear enclosure for best performances
- Respectful of its environment with zero upward lighting with clear enclosure
- Choice of dimming options and controls to reduce energy consumption: DALI2, Bi-power
- Zdal4i certified on request
- Ease of installation thanks to very low weight and pre-wiring



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

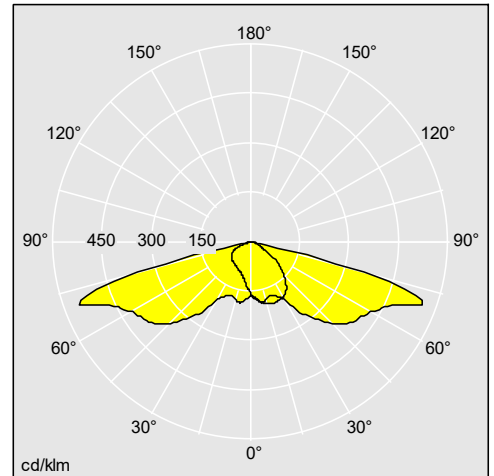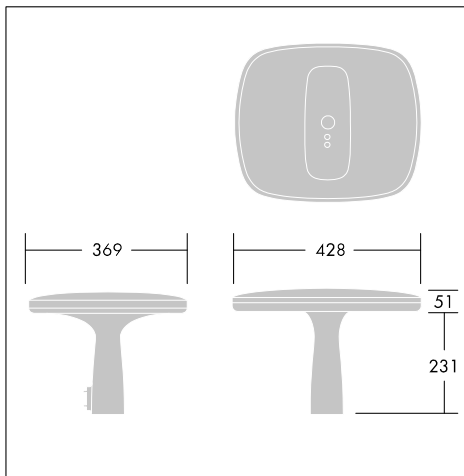

96270788

### Material/Finish

Canopy and base die cast aluminium (AS9U3, LM24 equivalent, EN AC-47100, standard corrosion class C3).

Diffuser: clear UV stabilised PC

Screw fixings: stainless steel

Finish: texturised anthracite (close to RAL7043), Choice of RAL colors via the configurator.

Flat enclosures: clear UV stabilised polycarbonate diffuser

### Installation/Mounting

Suitable for mounting on column Ø76mm or Ø60mm, spigot internal length: 75mm. Recommended height: 3/6m. Equipped with cable gland or pre-wired with HO7RNF cable. Spare driver available. Delivered ready to install, complete with factory fitted integral gear tray, all supplied in a single carton.

### Specification

To specify state:

A low weight post-top decorative lantern with 2 different enclosures : one opal for diffused light and comfort, one with clear enclosure for performance and no upward lighting emission: ULOR 0. A choice of optics, controls and connectivity with Zhaga interface addressing urban applications like parks, plazas and residential streets.

As Thorn FleXity.