



Cetus LED

Recessed LED downlight with low height, one for one replacement for traditional 1x26W or 2x26W compact fluorescent downlights

- Direct replacement for traditional 1x26W or 2x26W compact fluorescent downlights with up to 65% energy saving.
- Only 88mm overall height to allow installation into low and restricted ceiling voids
- Sealed to IP44 as standard, suitable for use in bathrooms without the need for separate attachments
- Integral 3 hour emergency option reduces installation time and complexity



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

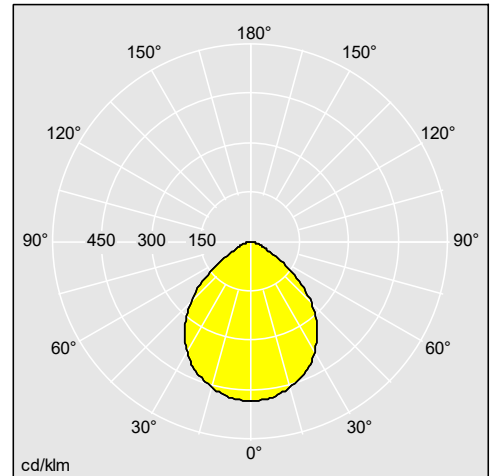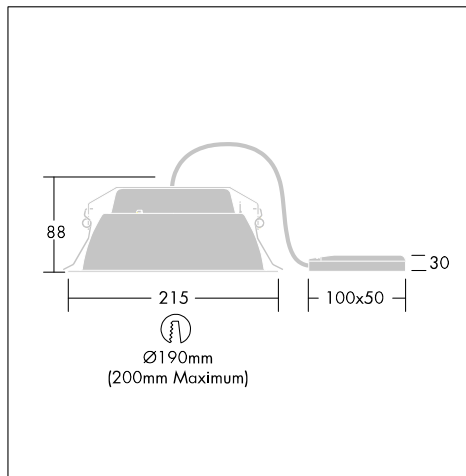

96242098

Material/Finish

Housing/body: aluminium, powder coated white RAL 9016

Reflector: powder coated white RAL 9016

Installation/Mounting

Cetus LED can be installed tool free, directly out of the box into a wide range of ceiling types and depths from 1-40mm thickness. The overall height of 88mm allows installation into low and restricted ceiling voids. Remote driver makes installation and maintenance quick and easy.

Specification

To specify state:

Cetus LED downlight incorporating thermally optimised, deep drawn, aluminium body with IP44 as standard.

As Thorn Cetus LED