



Urba Deco

Smart, sophisticated architectural urban lighting designed by Wilmotte

- IDA Dark Sky Approved
- *IDA fixture seal of approval relates to ≤ 3000 K only and clear enclosures. Luminaires must be mounted as photometered.
- Unique architectural shape with a sophisticated light signature
- Comfort lighting with Prismatic filter or louver
- High versatility with a choice of five mounting options and wide choice of light distributions
- Tool-free maintenance
- Zd4i certified on request
- Part of the URBA family: URBA, URBA DECO and URBA bollard



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

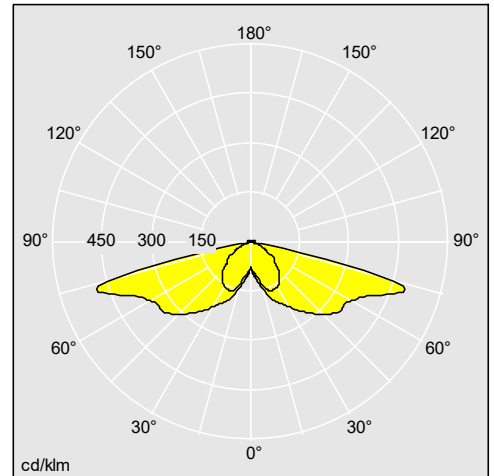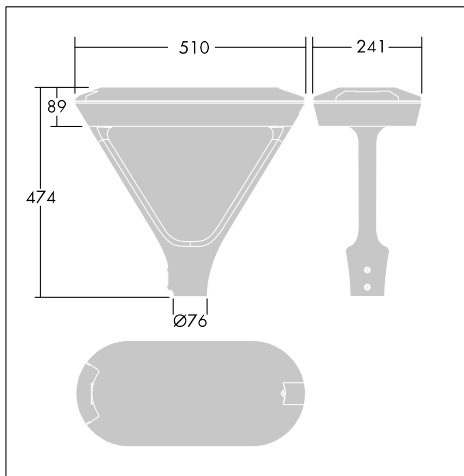

96273964

Material/Finish

Canopy and base: die cast aluminium (AS9U3, LM24 equivalent, EN AC-46000) textured black close to RAL 9005. Via the configurator: Texturized anthracite (ANT) and 48 other RAL possibilities.

Glass: 6mm thick clear or prismatic glass

Arms: die cast aluminium textured black close to RAL 9005, covered with a white or black (ULOR 0) shield in plastic ASA

Installation/Mounting

Post top, catenary, suspension and wall mounting. Recommended mounting height: post top 3 to 6m, suspended 3 to 8m, catenary 5 to 8m. Post Top: mounting on spigot/columns Ø60mm or Ø76mm: with 2 screws. Easy maintenance with tool free opening from above. Pre-wired, supplied complete and ready to install, in a single box. Catenary and suspension: fixing through 34G, maintenance with access from below. Dedicated columns and brackets available.

Specification

To specify state:

Decorative LED lantern with an unique lighting signature. Covers many applications with post top, suspended and catenary variants. Wide optical offer with a comfort prismatic variant and no upward lighting emissions, ULOR 0. Dimming with DALI2, Bi-power, Connectivity with Zhaga interface. Collection of dedicated mounting supports.

Part of the URBA family.

As Thorn Urba Deco.

Urba Deco

Ordering Guide

| Description | ILCOS Code | Socket | Wt (kg) | SAP Code |
|--|------------|--------|---------|----------|
| Urba Deco, post top | | | | |
| UD 24L35 730 WSC-S CL1 WS1 T60T BK | LED | | 7,14 | 96277181 |
| UD 24L70 730 WSC-S CL1 WS1 T60T BK | LED | | 7,14 | 96277182 |
| UD 48L35 730 WSC-S CL1 WS1 T60T BK | LED | | 7,29 | 96277184 |
| UD 48L50 730 WSC-S CL1 WS1 T60T BK | LED | | 7,29 | 96277185 |
| UD 24L25 730 WSC-S CL1 WS1 T60T BK | LED | | 7,14 | 96670050 |
| UD 24L50 730 WSC-S CL1 WS1 T60T BK | LED | | 7,14 | 96670052 |
| Urba Deco, suspended | | | | |
| UD 48L35-730 WSC-S CL1 WS1 MSU-T BK U0 | LED | | 6,53 | 96279226 |
| UD 48L50-730 WSC-S CL1 WS1 MSU-T BK U0 | LED | | 6,53 | 96279228 |
| UD 24L35 730 WSC-S CL1 WS1 MSU-T BK U0 | LED | | 6,38 | 96279216 |
| UD 24L50-730 WSC-S CL1 WS1 MSU-T BK U0 | LED | | 6,38 | 96279218 |
| UD 24L70-730 WSC-S CL1 WS1 MSU-T BK U0 | LED | | 6,38 | 96279220 |
| UD 24L25 730 WSC-S CL1 WS1 MSU-T BK U0 | LED | | 6,38 | 96670054 |
| Urba Deco, catenary | | | | |
| UD 24L50 730 WSC-S CL1 WS1 MCA-T BK U0 | LED | | 7,12 | 96279234 |
| UD 48L50 730 WSC-S CL1 WS1 MCA-T BK U0 | LED | | 7,27 | 96279244 |