



## FlexPak

### FlexPak - Smart High Bay Lighting

- Direct one-for-one replacement of HID high bays, with up to 70% energy saving
- Plug and play connection for rapid installation
- Innovative radio frequency controls system integrated as standard and future proof for wireless smart lighting
- Very wide temperature range from -35°C up to +50°C



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

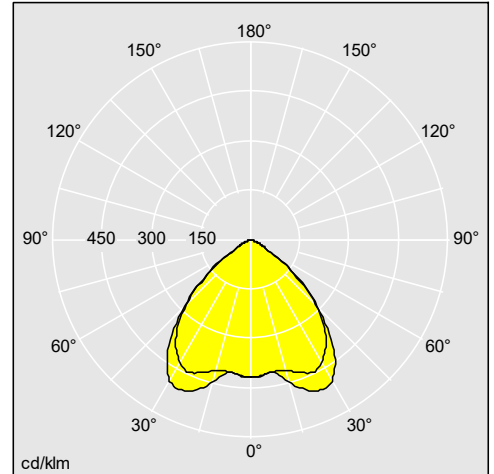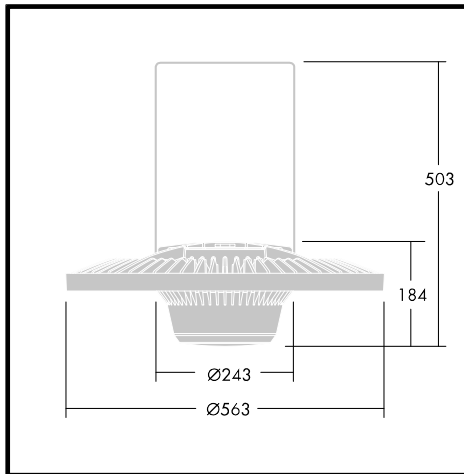

96628801

### Material/Finish

Housing: die cast aluminium (RAL 9006), polycarbonate

Lens: polycarbonate

Luminaire is silicon free

### Installation/Mounting

All luminaires are suitable for single point suspension. Chain suspension clip (96628823) supplied with each luminaire. Alternatively a cord suspension is available in 1m length, 2m length and 5m length. For ceiling and wall mounting, stirrups are available including tilt adjustment. For S-size (96628820), for M/L-size (96628822).

### Specification

To specify state:

An IP65 single point suspension LED high bay luminaire with plug and play connection for rapid installation. Available in 8000lm, 13000lm, 17000lm, 23000lm & 31500lm all with constant lumen output feature, with a choice of narrow beam, wide beam and very wide beam optic. As standard available with innovative radio frequency node to connect with remote IP65 sensors. Furthermore unique lighting experience with lit ring of light.

As Thorn FlexPak