


Isaro 2

Cost-effective LED road lighting solution for refurbishment projects

- Offers the best balance between cost of ownership and performance. Fitted with R-PEC® optic to bring safe and efficient light to residential streets and high traffic roads
- Comprehensive range of controls incorporating the Bi-Power Switch to activate or deactivate dimming onsite
- Available in 2 sizes up to 17klm, 11 precise light distributions and versatile installation possibilities - Isaro 2 adapts to any installation layout
- Compact and lightweight luminaire for easy handling and installation with a low windage



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

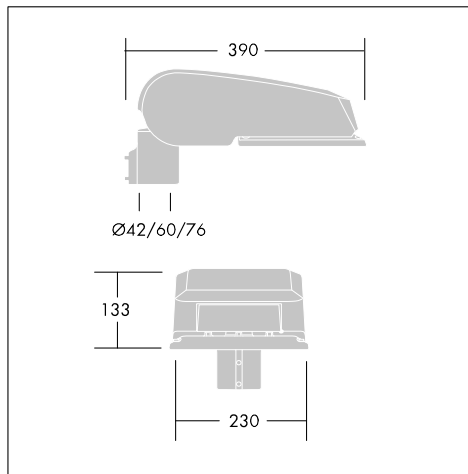

Material/Finish

Performance version: Canopy: die-cast aluminium, powder coated grey RAL 9006 (other RAL colours on request) with rear clip in stainless steel

Basic version: Canopy: reinforced plastic, RAL 9006 with screws

Body: die-cast aluminium unpainted

Spigot: plain die-cast aluminium

Enclosure: toughened glass

Screws: stainless steel

Installation/Mounting

Suitable for mounting on top Ø76mm or side Ø60mm or Ø42mm.

Variable tilting setting: 0° to +10° on post top mounting and -20° to 0° on lateral mounting, in 5° steps.

Tilt adaptor 0° with bracket tilted at -45° as accessory.

Cable gland for Ø8 to 12mm cable. Delivered ready to install, complete with factory fitted integral gear tray, all supplied in a single carton.

Specification

To specify state:

Unobtrusive, cost effective road lighting solution with 11 precise lighting distributions, fully versatile installation possibilities, low maintenance requirements and no need to replace LED driver. CMS with Radio Frequency and Powerline system, is also compatible with other controls systems. Choice of options and accessories: 10KV, automatic disconnection, BPS, LRT, photocell and external louvres.

As Thorn isaro 2