



Popular Range Battens

The original popular Range fluorescent batten

- Adjustable twin lampholder alters distribution to suit desired mounting height
- Tool-less, clip-on cover plate for quick installation
- Twist-lock lampholders for reliable electrical contact
- A range of diffusers and reflectors covering every application requirement



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

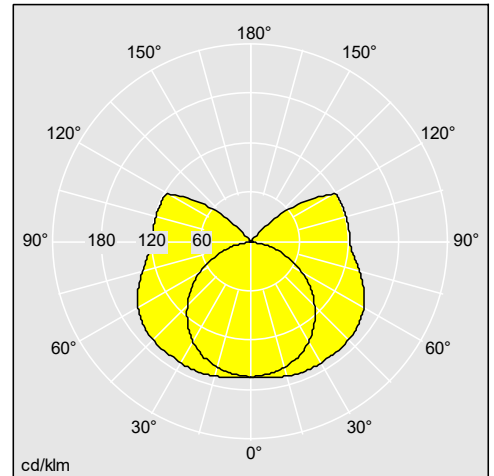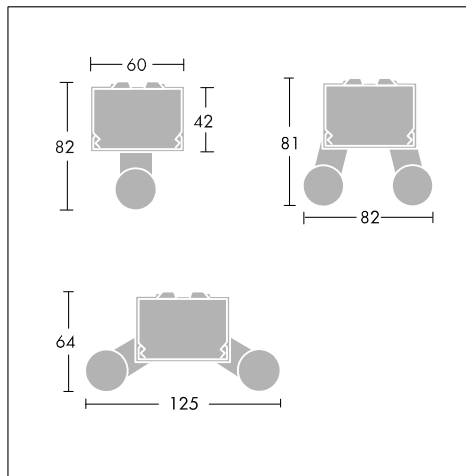

96550710

Material/Finish

Batten: rolled steel section in pre-coated high reflectivity white paint.
Lampholder assembly: tough white polycarbonate.

Installation/Mounting

Four-way terminal block with capacity for 2 x 2.5mm² cables.

Angled terminal block for easy wiring.

Ambient temperature: -5°C to +25°C.

Normal, dry, indoor atmospheres.

Fixings via two BESA piercings, one central and two at fixing centres: 600mm - 500mm, 1200/1500/1800mm - 600mm.

Bare battens can be mounted end-to-end (except emergency versions - recommended minimum space between luminaires 50mm).

Emergency fixing centres: 600mm, 1110mm and 1410mm.

Specification

To specify state:

Fluorescent batten with adjustable lamp holders (twin only) for beam choice, twist-lock lamp holders and clip in cover plate.
As Thorn Popular Pack.