



Quattro T5

Ultra shallow recessed modular T16 (T5) luminaires for exposed grid and concealed fix ceilings with choice of optic

- Shallow (58mm) square or rectangular body with plain white side panels
- Louvre and diffuser optics including very low glare louvre options for intensive or specialist VDU use
- Asymmetric louvre option for wall washing applications
- Versions with air handling functionality (30 l/s)



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

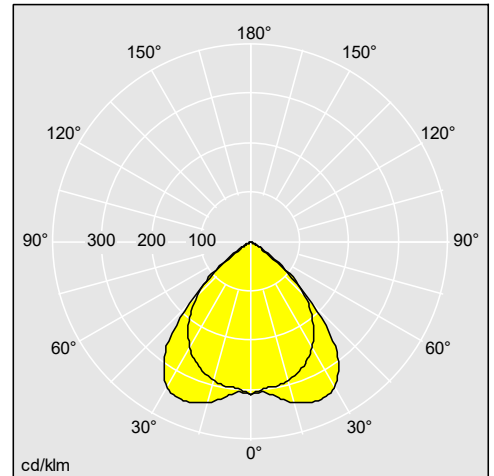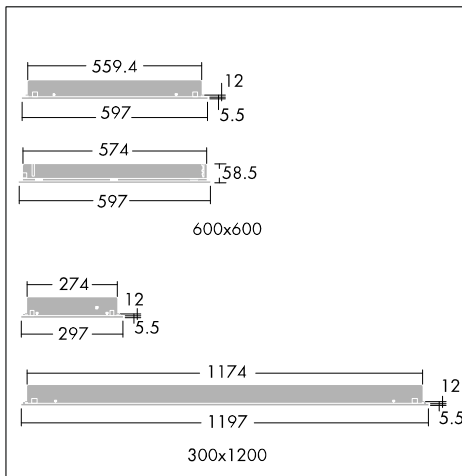

96211194

Material/Finish

Body: white painted steel (close to RAL 9010)
 Side panels: white painted steel (perforated for air handling version)
 Louvre: aluminium
 Diffuser: PETG panel with white plastic frame

Installation/Mounting

Suitable for most 15mm or 24mm exposed tee ceilings, the luminaire simply lays onto the ceiling grid for quick installation. For installation from below into concealed fixed and plasterboard ceilings, use mini-wedge brackets (supplied). Electrical connection is via flush panel mounted GST 18/4 male connector (plug) for fixed output WL4 versions and 18/6 box T connector for dimmable WL6 versions which protrudes 30mm from back of body. E3TX versions have an additional 18/3 box tee connector (not mains rated). Appropriate female connectors (sockets) must be ordered separately (see Thorn Connect range) to electrically connect with luminaires.

Specification

To specify state:

Recessed modular luminaire for T16 linear fluorescent lamps for use in concealed fixed, plasterboard or 15/24mm exposed tee ceilings, with 58mm depth and dedicated T16 louvre or framed prismatic panel. For emergency versions please specify E3 for manual testing and E3TX for Selftest/Addressable test.

As Thorn Quattro T5.