



A slim LED batten with contemporary design that provides great lighting quality for the application

- Unobtrusive and slim luminaire that integrates easily into the environment
- Elegant luminaire with minimalistic design
- Seamless lit-line with L and T connection possible as well as suspension
- Flexibility and ease of installation (quick electrical connector)
- Low cost of ownership

#### Application

- Office surrounding areas
- Break-out zones
- Corridors and circulation areas

#### Light source Information


- Life time 50 000 hours L70B50 Ta 25C
- 1 050lm (9W), 2 100lm(18W), 4 200lm(37W), 120Llm/W@4000K
- Colour temperature 3000K, 4000K
- CRI 80
- McAdams 4



'l' type connection





'l' type connection

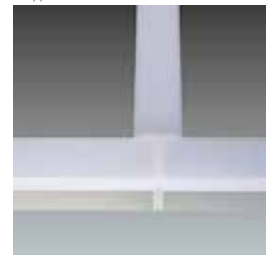

'T' type connection

#### Overview



**Standards**

650°C  IP20

 T<sub>a</sub>25

**Lamps**

 120  
Lm/W



Luminaire L1180



Electrical connector



I Bracket



T Bracket



Luminaire L580



Side feed-in cable



L Bracket



Suspension kit

**Ordering Guide**

Complete luminaires supplied with optic, LED, driver and surface mounting kit.

Description	Wt (kg)	SAP Code	Cat No.
<b>Mains cable back feed-in</b>			
<b>Fixed output</b>			
EQUAMINI L580 LED950-830	0.53	22660806	EQM6950Z3K
EQUAMINI L1180 LED1900-830	1.04	22660808	EQM121900Z3K
EQUAMINI L580 LED1050-840	0.53	22660811	EQM61050Z4K
EQUAMINI L1180 LED2100-840	1.04	22660812	EQM122100Z4K
<b>DALI dimmable</b>			
EQUAMINI L580 LED1900-830 HFX	0.69	22661227	EQM61900X3K
EQUAMINI L1180 LED3800-830 HFX	1.08	22661228	EQM123800X3K
EQUAMINI L580 LED2100-840 HFX	0.69	22661229	EQM62100X4K
EQUAMINI L1180 LED4200-840 HFX	1.04	22661231	EQM124200X4K
<b>Mains cable end-cap side feed-in</b>			
<b>Fixed output</b>			
EQUAMINI L580 LED950-830 END	0.53	22660814	EQM6950Z3KEND
EQUAMINI L1180 LED1900-830 END	1.04	22660816	EQM121900Z3KEND
EQUAMINI L580 LED1050-840 END	0.53	22660830	EQM61050Z4KEND
EQUAMINI L1180 LED2100-840 END	1.04	22660823	EQM122100Z4KEND
<b>DALI dimmable</b>			
EQUAMINI L580 LED1900-830 HFX END	0.69	22661240	EQM61900X3KEND
EQUAMINI L1180 LED3800-830 HFX END	1.08	22661232	EQM123800X3KEND
EQUAMINI L580 LED2100-840 HFX END	0.69	22661233	EQM62100X4KEND
EQUAMINI L1180 LED4200-840 HFX END	1.04	22661234	EQM124200X4KEND
<b>Accessories</b>			
EQUAMINI ELECTRICAL CONNECTOR		22660825	EQMCON
EQUAMINI SIDE FEED IN CABLE 300MM		22660826	EQMFEEED
EQUAMINI SUSPENSION KIT PAIR 1500		22661235	EQMS1500
EQUAMINI I BRACKET		22660831	EQMI
EQUAMINI L BRACKET		22660840	EQML
EQUAMINI T BRACKET		22660832	EQMT


HF Fixed output  
HFX DALI

**Materials/Finish**

Body: extruded aluminium with anodised finish  
Diffuser: opal polycarbonate  
End-cap: polycarbonate with integrated socket system

**Installation/Mounting**

Suitable for surface or suspended mounting.  
Electrical connection to terminal block via flap in rear of body or from end-cap side via electrical connector. Continuous linking possible.

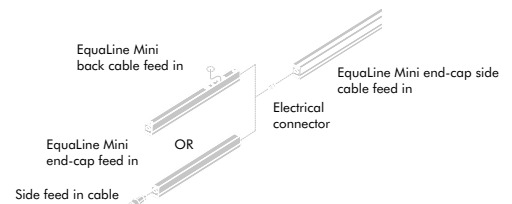

**Specification**

To specify state:  
A slender LED batten with aluminium body and opal PC diffuser, lengths of 580mm and 1180mm. High efficacy up to 120Lm/W. Can be individually or continuously mounted. Provides lumen packages of 1050,2100 and 4200lm. Electrical mains connection between luminaires through connector system integrated in end-caps.  
As Thorn Equaline Mini.



**5 Year Warranty**  
As a globally leading luminaire manufacturer, Thorn Lighting provides a five-year warranty for its complete product range within all European Countries. [www.thornlighting.com/warranty](http://www.thornlighting.com/warranty)