



AquaForce II

A highly durable, IP65 rated, luminaire for use in wet and dusty areas, where reliability is important

- Deep gasket channel for an assured IP65 seal
- Suspensible gear tray for easy maintenance
- Connect, ready to install versions



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

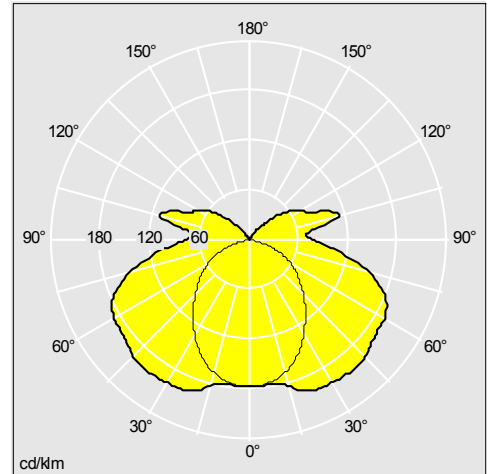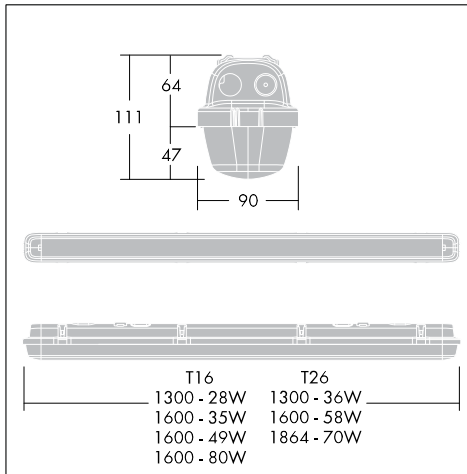

96236888

Material/Finish

Canopy and diffuser: injection moulded fire retardant polycarbonate.
 Gear tray: sheet steel, white enamel finish
 Toggles: polycarbonate (stainless steel available)

Installation/Mounting

Cable entry positions at the back and each end of the fitting. Stainless steel quick-fix brackets supplied with each luminaire. Toggle clips easy to fit and close by hand. Connect versions available with fast electrical connection facility. Conduit box mounting, chain suspension, conduit suspension and catenary suspension kits, plus through wire kits are all available (see accessories listing). Suitable for all indoor plus external 'under cover only' applications.

Specification

To specify state:
 Deep channel, polycarbonate IP65 luminaire with stainless steel gear tray and stainless steel fixing clips.
 As Thorn AquaForce II

AquaForce II

Ordering Guide Supplied complete with lamp(s)

| Description | ILCOS Code | Socket | Wt (kg) | SAP Code |
|-----------------------------------|------------|--------|---------|----------|
| AquaForce II T16 | | | | |
| AQUAF2 1x28W T16 HF L840 | FDH | G5 | 2,1 | 96236923 |
| AQUAF2 1x49W T16 HF L840 | FDH | G5 | 2,5 | 96236925 |
| AQUAF2 1x35W T16 HF L840 | FDH | G5 | 2,4 | 96236924 |
| AQUAF2 1x80W T16 HF L840 | FDH | G5 | 2,5 | 96236926 |
| AQUAF2 2x28W T16 HF L840 | FDH | G5 | 2,5 | 96236927 |
| AQUAF2 2x35W T16 HF L840 | FDH | G5 | 2,5 | 96236928 |
| AQUAF2 2x49W T16 HF L840 | FDH | G5 | 2,5 | 96236929 |
| AquaForce II T16 dimmable | | | | |
| AQUAF2 1x35W T16 HFI L840 | FDH | G5 | 2,4 | 96240564 |
| AQUAF2 1x49W T16 HFI L840 | FDH | G5 | 2,45 | 96240565 |
| AQUAF2 2x35W T16 HFI L840 | FDH | G5 | 2,9 | 96240566 |
| AQUAF2 2x49W T16 HFI L840 | FDH | G5 | 3,4 | 96240567 |
| AquaForce II T16 emergency | | | | |
| AQUAF2 2x35W T16 HF E3 L840 | FDH | G5 | 4,7 | 96236934 |
| AQUAF2 2x49W T16 HF E3 L840 | FDH | G5 | 3,5 | 96236935 |
| AQUAF2 2x28W T16 HF E3 L840 | FDH | G5 | 3,5 | 96236933 |
| AQUAF2 1x49W T16 HF E3 L840 | FDH | G5 | 3,5 | 96236932 |
| AQUAF2 1x28W T16 HF E3 L840 | FDH | G5 | 2,9 | 96236930 |
| AQUAF2 1x35W T16 HF E3 L840 | FDH | G5 | 2,9 | 96236931 |
| AquaForce II T26 | | | | |
| AQUAF2 1x36W T26 HF L840 | FD | G13 | 1,8 | 96503023 |
| AQUAF2 1x58W T26 HF L840 | FD | G13 | 1,8 | 96503046 |
| AQUAF2 1x70W T26 HF L840 | FD | G13 | 3,7 | 96503069 |
| AQUAF2 2x36W T26 HF L840 | FD | G13 | 2,6 | 96503092 |
| AQUAF2 2x58W T26 HF L840 | FD | G13 | 3,1 | 96503115 |
| AQUAF2 2x70W T26 HF L840 | FD | G13 | 3 | 96503138 |
| AquaForce II T26 emergency | | | | |
| AQUAF2 2x58W T26 HF E3 L840 | FD | G13 | 4,1 | 96503123 |
| AQUAF2 1x58W T26 HF E3 L840 | FD | G13 | 3,1 | 96503054 |
| AQUAF2 1x36W T26 HF E3 L840 | FD | G13 | 2,6 | 96503031 |
| AQUAF2 1x70W T26 HF E3 L840 | FD | G13 | 4 | 96503077 |
| AQUAF2 2x36W T26 HF E3 L840 | FD | G13 | 3,4 | 96503100 |
| AQUAF2 2x70W T26 HF E3 L840 | FD | G13 | 4 | 96503146 |
| AquaForce II Accessories | | | | |
| FORCE2 BESA KIT | | | 0,53 | 96503168 |
| FORCE2 MRS KIT | | | 0,06 | 96503169 |
| FORCE2 28/36 TW KIT HGF | | | 2 | 96503163 |
| FORCE2 35/49/58 TW KIT HGF | | | 2 | 96503164 |
| FORCE2 FIX KIT | | | 0,02 | 96503166 |
| FORCE2 FIX/CH KIT | | | 0,02 | 96503167 |
| FORCE2 28/36 RS CLIP KIT | | | 0,05 | 96503157 |
| FORCE2 35/49/58 RS CLIP KIT | | | 0,06 | 96503158 |

AquaForce II

| Description | ILCOS Code | Socket | Wt (kg) | SAP Code |
|-----------------------------|------------|--------|---------|----------|
| FORCE2 28/36 PC CLIP KIT | | | 0,04 | 96503160 |
| FORCE2 35/49/58 PC CLIP KIT | | | 0,05 | 96503161 |
| FORCE2 MCA KIT | | | 0,1 | 96233817 |
| FORCE2 R 1x28/36/54 | | | 0,52 | 96235134 |
| FORCE2 R 1x35/49/58/80 | | | 0,15 | 96235135 |
| FORCE2 R 2x28/36 | | | 0,25 | 96235136 |
| FORCE2 R 2x35/49/58 | | | 0,65 | 96235137 |