



96262942 ISARO 140W HIT-DGE CL1 EFL MA42 /L

IP66 IK08  


Isaro

A road and street lantern, designed for durability, for 1 x 140W CPO-TW lamp. Electronic, fixed output control gear. Class I electrical, IP66, IK08. Body: die-cast aluminium, powder coated grey (RAL9006). Bracket: die-cast aluminium, unpainted. Enclosure: flat glass. Suitable for side mounting on Ø34-42mm spigot. Variable tilting in 5° steps, post top: 0° to +10°, lateral: -20° to 0°. Cable gland for Ø8 to 12mm cable. Safe access (automatic disconnection) from above to the gear tray and optical system after quick release of the stainless steel front clip. Delivered, ready to install, in a single carton. Complete with lamp.

Total power: 153 W
 Dimensions: 602 x 282 x 146 mm
 Weight: 6.11 kg
 Scx: 0.063 m²



TLG_ISRO_F_HIDMLEEFLPRO.jpg

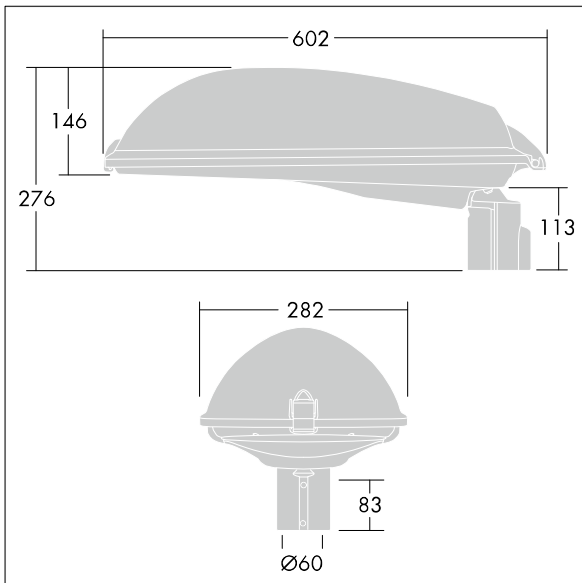

TLG_ISRO_M_HIDFLTG.wmf

Isaro

96262942 ISARO 140W HIT-DGE CL1 EFL MA42 /L

THORN