



96262960 ISARO 150W HST-DGE CL1 PC PN MA42 /L

IP66 IK10  


Isaro

A road and street lantern, designed for durability, for 1 x 150W HST-MF lamp. Electronic, fixed output control gear. Class I electrical, IP66, IK10. Body: die-cast aluminium, powder coated grey (RAL9006). Bracket: die-cast aluminium, unpainted. Enclosure: shallow polycarbonate. Suitable for side mounting on Ø34-42mm spigot. Variable tilting in 5° steps, post top: 0° to +10°, lateral: -20° to 0°. Cable gland for Ø8 to 12mm cable. Safe access (automatic disconnection) from above to the gear tray and optical system after quick release of the stainless steel front clip. Delivered, ready to install, in a single carton. Equipped with Nema photocell socket. Complete with lamp.

Total power: 161 W
 Dimensions: 602 x 282 x 195 mm
 Weight: 5.32 kg
 Scx: 0.069 m²



TLG_ISRO_F_HIDMLEESHPRO.jpg

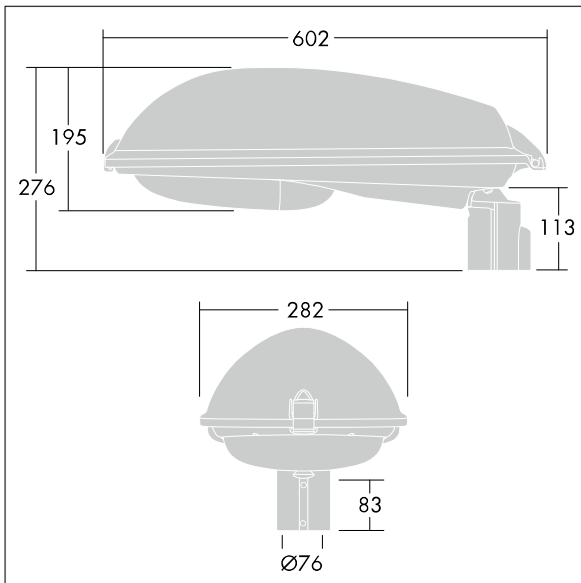

TLG_ISRO_M_HID.wmf

Isaro

96262960 ISARO 150W HST-DGE CL1 PC PN MA42 /L

THORN