

Club

96242254 CLUB 1000 LED2 E3 OP RD CHR L840

IP54	IK08			850°C	T _a 0 +25
------	------	---	---	-------	-------------------------

Club

A round bulkhead LED luminaire. Electronic, fixed output control gear with 3 hour, manual test, emergency lighting circuit. Body: injection moulded polycarbonate. Bezel: injection moulded polycarbonate, polished chrome finish. Diffuser: opal polycarbonate. Electrical safety class I. Ingress protection IP54. Complete with 4000K LED


Dimensions: Ø327 x 105 mm

Total power: 13 W

Weight: 1.7 kg



TLG_CLUB_F_CHMUNLIT.jpg

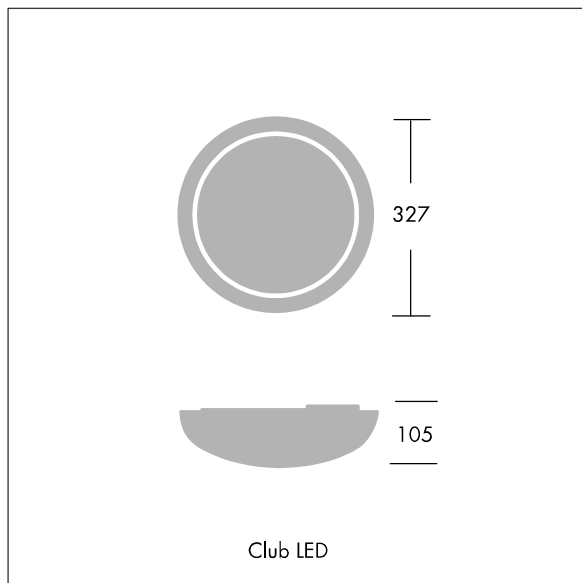

TLG_CLUB_M_LEDLD1.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Colour temperature is subject to a tolerance of up to ± 150 Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint. Unless otherwise stated all Thorn LED products are suitable for unrestricted use (rated RG0 or RG1) with regard photobiological blue light safety (IEC/EN60598-1).

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Club

96242254 CLUB 1000 LED2 E3 OP RD CHR L840

THORN