



Jalon LED

96271422 JALON LED 12L18 830 MWA V

THORN

IP65 IK05  

Jalon LED

A wall recessed LED luminaire for guidance, in vertical orientation. 12 LEDs, driven at a fixed 180mA by integral driver. Body: die-cast aluminium, painted dark grey. Enclosure: polycarbonate. Supplied with polyethylene recessed box (96271424, 128 x76 x 61 mm), also available separately. Electrical connection via 2 pole terminal block. Class II electrical (this product is not earthed), IP65, IK05. Complete with 3000K LED.

Dimensions: 71 x 108 x 51 mm

Total power: 4 W


Luminaire luminous flux: 96 lm

Luminaire efficacy: 24 lm/W

Weight: 0.3 kg



TLG_JALL_F_MWAVPDB.jpg

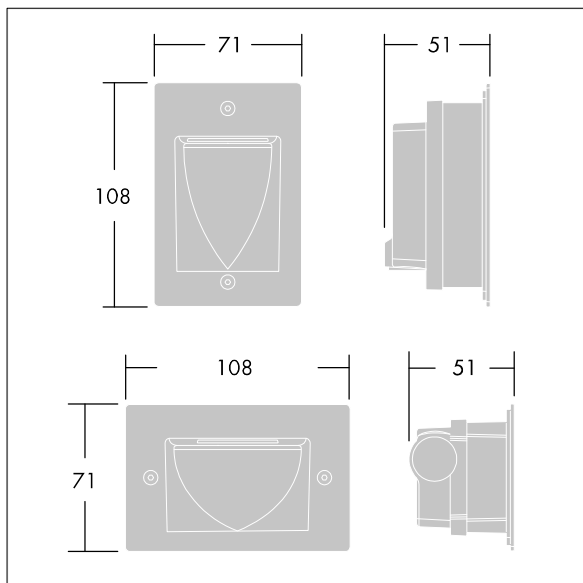

TLG_JALL_M_LD1.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Colour temperature is subject to a tolerance of up to ± 150 Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C .

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint. Unless otherwise stated all Thorn LED products are suitable for unrestricted use (rated RG0 or RG1) with regard photobiological blue light safety (IEC/EN60598-1).

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Jalon LED

96271422 JALON LED 12L18 830 MWA V

THORN