

# Arena Symphony LED

THORN

96645156 ARENA LED6500-840 HFSX TW WL6 EFL

IP20	IK03			650°C	$T_a$ 0 +25
------	------	---	---	-------	----------------

## Arena Symphony LED

A suspended architectural raft, incorporating a direct/indirect LED luminaire and sensor unit (daylight / presence / remote) control, connected to the DALI bus. Electronic, DALI dimmable control gear. Class I electrical, IP20. Raft and luminaire frame: aluminium. Optic: flat acrylic. Supplied with a 6 pole Wieland plug on 3.4m of 6 core cable and a panel mounted 6 pole Wieland socket for through wiring. Supplied with suspension wires. Complete with 4000K LED.

Dimensions: 2200 x 850 x 100 mm

Total power: 55.5 W


Luminaire luminous flux: 6300 lm

Luminaire efficacy: 114 lm/W

Weight: 23.7 kg



TLG\_ARNS\_F.jpg

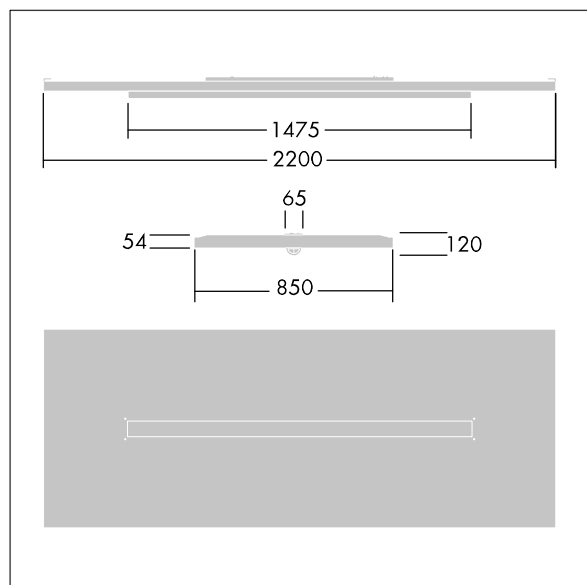

TLG\_ARNS\_M\_LD1.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Colour temperature is subject to a tolerance of up to  $\pm 150$  Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of  $25^\circ\text{C}$ .

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint. Unless otherwise stated all Thorn LED products are suitable for unrestricted use (rated RG0 or RG1) with regard photobiological blue light safety (IEC/EN60598-1).

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# Arena Symphony LED

96645156 ARENA LED6500-840 HFSX TW WL6 EFL

THORN