

## PopPack LED

96643388 POPPACK +LED9000-840 HFI L1500

IP20	IK03			650°C	T <sub>a</sub> -20 +25
------	------	---	---	-------	---------------------------


### PopPack LED

Batten LED luminaire with replaceable light engine.  
Electronic, DALI dimmable. Body: coated, formed steel, white (RAL9016). End caps: injection moulded polycarbonate, white. Diffuser: textured opal acrylic.  
Electrical connection via (3 + 2) x 2 x 2.5mm<sup>2</sup> terminal block. Complete with 4000K LED

Dimensions: 1449 x 60 x 74 mm  
Total power: 75.2 W  
Luminaire luminous flux: 9000 lm  
Luminaire efficacy: 120 lm/W  
Weight: 1.7 kg



TLG\_POPR\_F\_LEDPDB.jpg

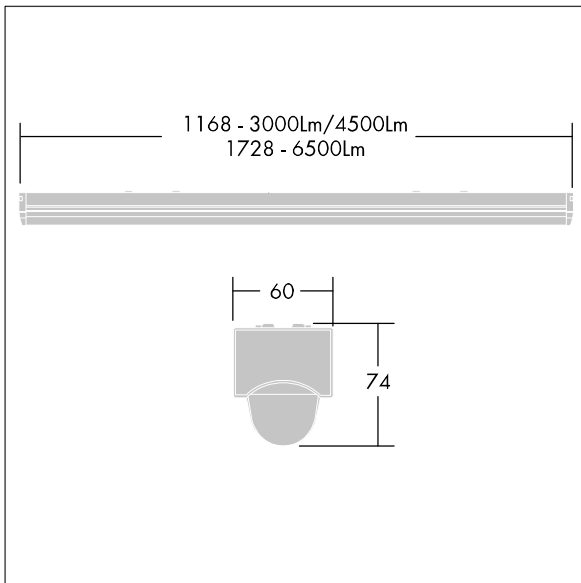

TLG\_POPR\_M\_LED.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Colour temperature is subject to a tolerance of up to  $\pm 150$  Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint. Unless otherwise stated all Thorn LED products are suitable for unrestricted use (rated RG0 or RG1) with regard photobiological blue light safety (IEC/EN60598-1).

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# PopPack LED

96643388 POPPACK +LED9000-840 HFI L1500

THORN