

# Omega LED

THORN

96629742 OMEGA LED 3300-830 HF Q597

T <sub>p(b)</sub>						650 °C	T <sub>a</sub> 25
-------------------	--	--	--	--	--	--------	-------------------


## Omega LED

A recessed/surface/suspended LED luminaire with a slim 12mm profile. Electronic, fixed output control gear. Class II electrical, IP44 from below, IP44\_IP20 from above, IK02. Body: steel sheet, white (RAL9016). Diffuser: UV-stabilized opal acrylic. Electrical connection via push wire terminal blocks, loop in/loop out possible. Complete with 3000K LED

Dimensions: 597 x 597 x 12 mm  
Total power: 29 W  
Luminaire luminous flux: 3150 lm  
Luminaire efficacy: 109 lm/W  
Weight: 5.1 kg



TLG\_OMGL\_F\_SLIM.jpg

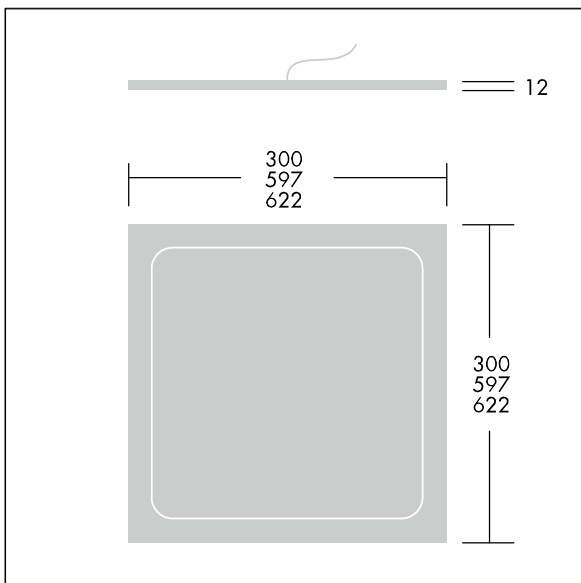

TLG\_OMGL\_M\_LDSQ.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Colour temperature is subject to a tolerance of up to  $\pm 150$  Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint. Unless otherwise stated all Thorn LED products are suitable for unrestricted use (rated RG0 or RG1) with regard photobiological blue light safety (IEC/EN60598-1).

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# Omega LED

96629742 OMEGA LED 3300-830 HF Q597

THORN