

## 96220713 PRISMA LED HF 4200 FR SLDMD BASIC L840

EN 55015		IP44			650 °C	
-------------	--	------	--	--	--------	--


### Prisma

Slim surface mounted LED luminaire. Electronic, fixed output control gear. Class I electrical, IP44. Body: white painted galvanised steel sheet. End caps: white plastic. Diffuser: frosted acrylic. Keyhole fixing positions Ø14mm for direct mounting to ceiling, wall or brackets. Fixing centres: 795mm. Two cable entries Ø19mm in the rear of the body. Grommets included. Electrical connection via 5 x 2 x 2.5mm<sup>2</sup> piano key terminal block. Fitted with high frequency sensor with on/off function for mounting height of up to 4m. This luminaire is suitable for small areas where one luminaire is sufficient. Please be aware, if used at maximum sensitivity, the sensor can detect through windows, doors and thin walls. The luminaire is not recommended to be placed outdoors or where material is moving, neither should it be exposed to vibrations. IP44 dust and moisture proof body extends application to canteens, cafeterias and kitchens. For stand-alone operation only. Complete with 4000K LED

Dimensions: 972 x 167 x 64 mm  
 Total power: 38.9 W  
 Weight: 3.2 kg



TLG\_PRSM\_F\_01.jpg

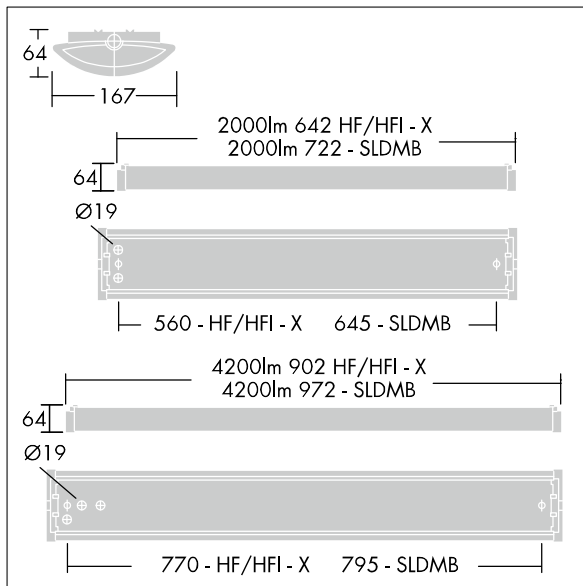

TLG\_PRSM\_M\_LEDLD3.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Colour temperature is subject to a tolerance of up to +/-150 Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint. Unless otherwise stated all Thorn LED products are suitable for unrestricted use (rated RG0 or RG1) with regard photobiological blue light safety (IEC/EN60598-1).

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
 © Thorn Lighting

**Prisma**

**96220713 PRISMA LED HF 4200 FR SLDMD BASIC L840**

**THORN**