

## Jupiter 3

96550858 JUP3 D 1X28W T16 HF E3 DSB L840

IP20			850 °C	T <sub>a</sub> 5 25
------	--	--	--------	------------------------

### Jupiter 3


A slim, lightweight, surface mounted and suspended luminaire in a simple, practical and robust design with direct distribution. for 1 x 28W lamp(s). Body: steel sheet, painted white (close to RAL 9010). Endcaps: moulded white polycarbonate. Optic: satinbrite anodised aluminium louvre. Class I electrical, IP20. Electrical connection via piano key terminal block. Self balancing, may be mounted individually or in continuous lines. Complete with 840 lamp (s).

To suspend Direct distribution versions you must order suspension wire kit 96241826 separately. This is included in the Direct/Indirect versions.

Dimensions: 1276 x 144 x 46 mm  
 Total power: 31 W  
 weight: 4.24 kg



TLG\_JUP3\_F\_DSGLDSBE3PDB.jpg

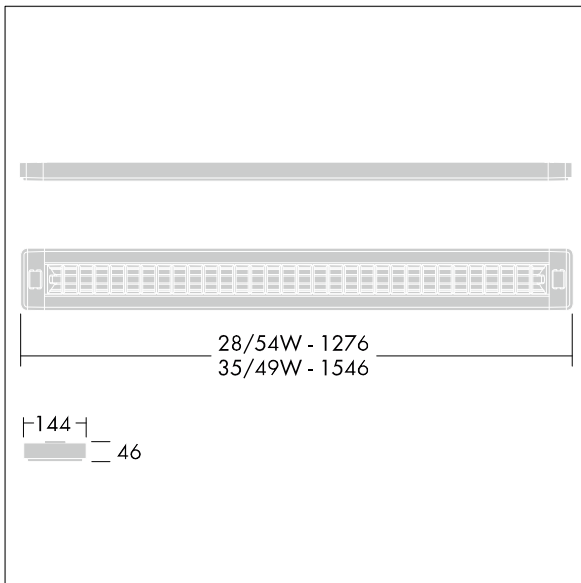

TLG\_JUP3\_M\_LDSNG.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Colour temperature is subject to a tolerance of up to  $\pm 150$  Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint. Unless otherwise stated all Thorn LED products are suitable for unrestricted use (rated RG0 or RG1) with regard photobiological blue light safety (IEC/EN60598-1).

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
 © Thorn Lighting

## Jupiter 3

96550858 JUP3 D 1X28W T16 HF E3 DSB L840

THORN