

Omega Circular

THORN


96627771 OMEGA C LED2800-830 HF R400

IP20	IK02			$T_a 0$ $+25$
------	------	---	---	------------------


Omega Circular

A versatile, circular edge lit panel for recessed mounting in a $\text{Ø}200\text{mm}$ cutout. Electronic, fixed output control gear. Class I electrical, IP20. Body: aluminium and steel,. Diffuser: acrylic opal. Complete with 3000K LED.

Dimensions: $\text{Ø}400 \times 55 \text{ mm}$
Total power: 33 W
Luminaire luminous flux: 2646 lm
Luminaire efficacy: 80 lm/W
Weight: 3.3 kg

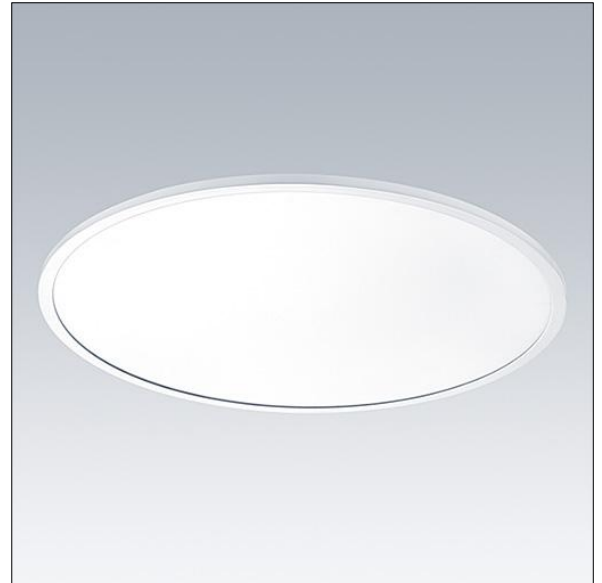

TLG_OMGC_F_PDB.jpg

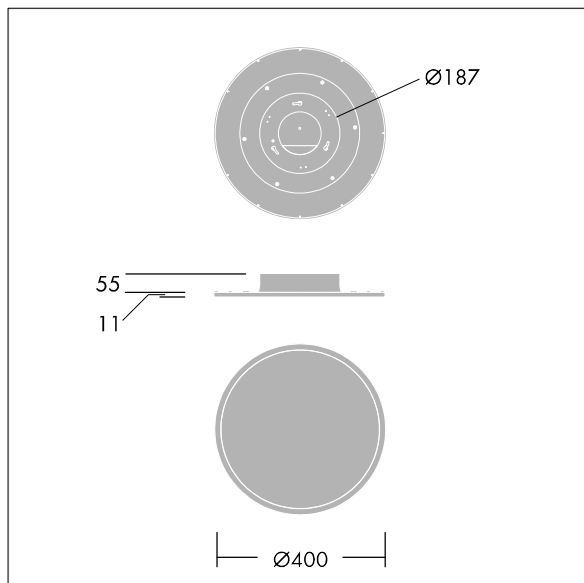

TLG_OMGC_M_2800.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Colour temperature is subject to a tolerance of up to ± 150 Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C .

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint. Unless otherwise stated all Thorn LED products are suitable for unrestricted use (rated RG0 or RG1) with regard photobiological blue light safety (IEC/EN60598-1).

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Omega Circular

96627771 OMEGA C LED2800-830 HF R400

THORN