

Prisma

THORN

96630833 PRISMA LED3000-830 HF FR L600 TW

| | | | | | | | | | |
|----------|------|---|------|---|----|---|---|---|-------|
| EN 55015 | IP44 | ▽ | IK06 | ⊕ | CE | ⚠ | ⚡ | ⊗ | 650°C |
|----------|------|---|------|---|----|---|---|---|-------|


Prisma

Slim Surface mounted LED luminaire. Electronic, fixed output control gear. Class I electrical, IP44. Body: pre-coated steel. End caps: white plastic. Diffuser: frosted acrylic. Keyhole fixing positions Ø14mm for direct mounting to ceiling, wall or brackets. Fixing centres: 500mm. Two cable entries Ø19mm in the rear of the body and knockouts in the endcaps. Grommets included. Electrical connection via 3 x 2 x 2.5mm² piano key terminal block. Through Wiring. Complete with 3000K LED

Dimensions: 616 x 166 x 64 mm
Luminaire input power: 27 W
Luminaire luminous flux: 2850 lm
Luminaire efficacy: 106 lm/W
Weight: 1.52 kg



TLG_PRSM_F_01.jpg

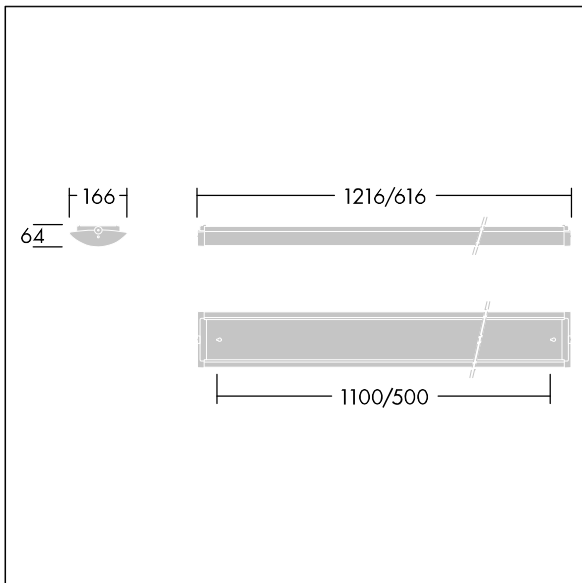

TLG_PRSM_M_LED_LD1.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Prisma

96630833 PRISMA LED3000-830 HF FR L600 TW

THORN