

IQ Wave

THORN

92912363 IQ WAVE LED3100-830 BC E3 Q597 MRE

↓ IP20 ↑ IP44	IK03	⊕	CE	⚡	⊗	650°C	T _a 0 +25
------------------	------	---	----	---	---	-------	-------------------------

IQ Wave


Recessed modular, direct LED luminaire. Electronic, dimmable control gear, Wireless controlled via App with Bluetooth® 4.x - basicDIM Wireless, (installation in metal ceilings not allowed). Luminaire arrangement: Mobile control to luminaire max. 15 m, luminaire to luminaire max. 4 m (centre). Class I electrical, IP44_IP20, IK03. Body: highly reflective steel. Frame and end caps: polycarbonate. Diffuser: polycarbonate with aluminium heatsink. Gear tray: powder coated white steel. Suitable for lay in or pull up (with accessory) installation. Complete with 3000K LED

Radio definition: basicDIM Wireless - Bluetooth® 4.x,
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 597 x 597 x 97 mm
Luminaire input power: 30 W
Luminaire luminous flux: 3050 lm
Luminaire efficacy: 102 lm/W
Weight: 4.4 kg



TLG_IQWV_F_PDBCEILING.jpg

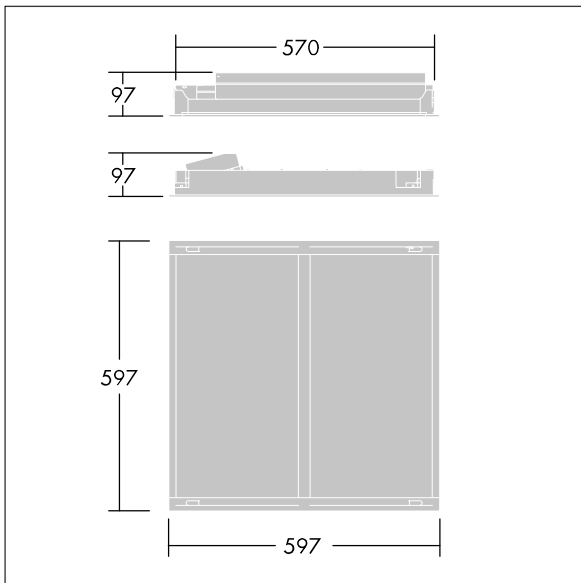

TLG_IQWV_M_600.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

IQ Wave

92912363 IQ WAVE LED3100-830 BC E3 Q597 MRE

THORN