

Omega Pro 2 Mini


96634480 OP2 1800-940 OP HF E3 Q300 MRP

IEC EN 60598-1 RG 0	↓ IP20 ↑ IP40	IK03	⊕	CE	⚡	⊗	850°C	T _a 0 +35
---------------------------	------------------	------	---	----	---	---	-------	-------------------------


Omega Pro 2 Mini

A shallow, versatile edge lit LED luminaire for lay-in and plasterboard ceilings as well as surface mounting with additional collar. LED driver, Fixed output with 3 hour, manual test, emergency lighting circuit. Class II electrical (this product is not earthed), IP20, Impact strength: IK03. Body: steel sheet, finished white (close to RAL9016). Diffuser: UV-stabilised polymethylmethacrylate opal optic for wide light distribution. Electrical connection via piano key terminals, loop-in/loop-out possible. Complete with 4000K LED, Colour Rendering Index min.: 90

Dimensions: 297 x 297 x 46 mm
 Luminaire input power: 19.2 W
 Luminaire luminous flux: 1710 lm
 Luminaire efficacy: 89 lm/W
 Weight: 1.67 kg

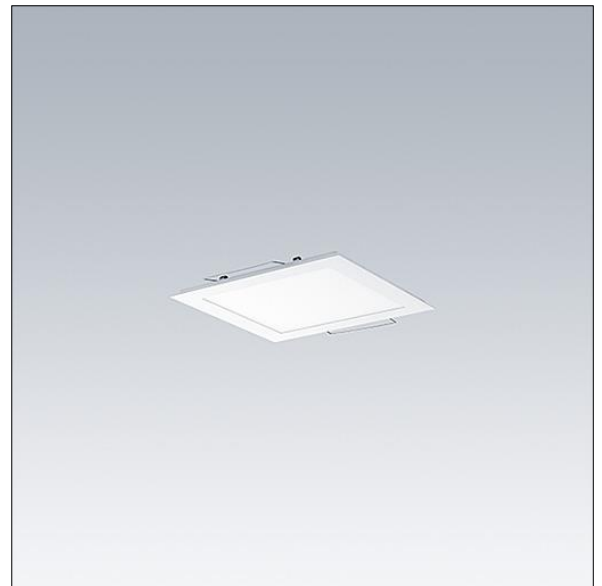

TLG_OMP2_F_Q30P.jpg

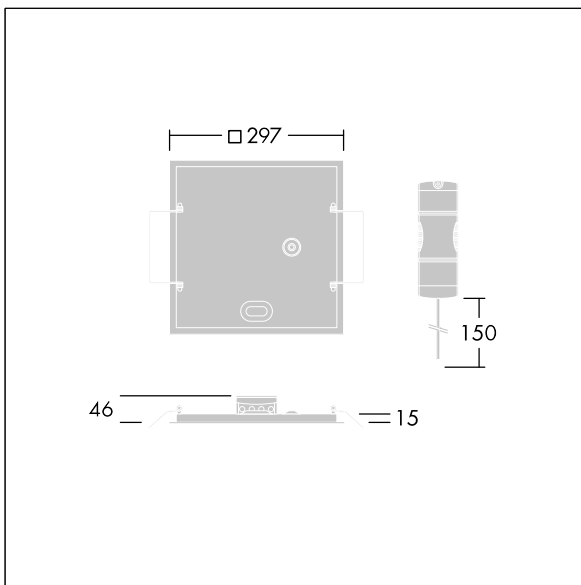

TLG_OMP2_M_Q3.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Omega Pro 2 Mini

96634480 OP2 1800-940 OP HF E3 Q300 MRP

THORN