

# Novaline Style

96635315 NOVS M 2500-840 DI HF WH

THORN

|                           |      |          |      |   |         |      |    |       |                           |
|---------------------------|------|----------|------|---|---------|------|----|-------|---------------------------|
| IEC EN<br>60598-1<br>RG 1 | RoHS | UK<br>CA | IP54 | D | halogen | IK08 | CE | 850°C | T <sub>a</sub> -15<br>+25 |
|---------------------------|------|----------|------|---|---------|------|----|-------|---------------------------|


## Novaline Style

Decorative circular luminaire with medium body. Low indirect component for wall and ceiling illumination. Electronic, fixed output control gear. Aesthetic trim of the luminaire made of polycarbonate in white. Diffuser: opal polycarbonate. Class II electrical (this product is not earthed), IP54. Complete with 4000K LED.

Dimensions: Ø397 x 69 mm  
Luminaire input power: 17.6 W  
Luminaire luminous flux: 2500 lm  
Luminaire efficacy: 142 lm/W  
Weight: 2.12 kg



TLG\_NOVS\_F\_4WH.jpg

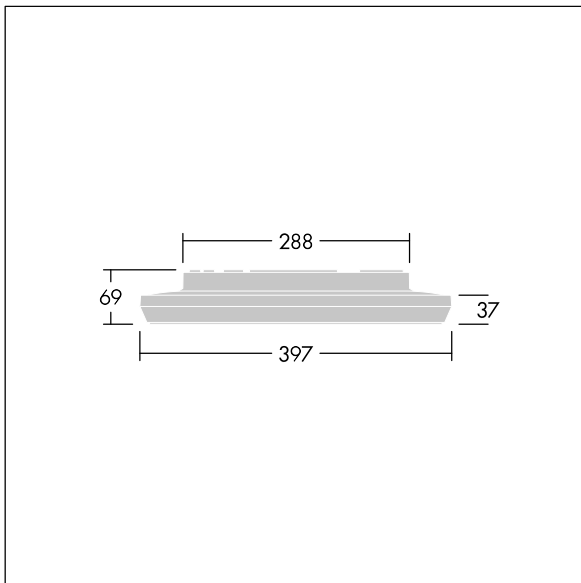

TLG\_NOVS\_M\_LD400.wmf

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting