

UK CA	IP40	IK06		CE	T _a -20 +35
------------------	------	------	--	-----------	---------------------------


LED bedhead luminaire with independent control of both direct and indirect light

High output bedhead luminaire with low glare for hospital ward lighting that complies with LG2: Lighting for healthcare premises (2019). Class I electrical , IK06, IP40. Electronic, DALI dimmable control gear. Luminaire made of steel sheet in white. Smooth radiused surfaces to facilitate cleaning and reduction of bacteria traps. Diffuser: Opal acrylic PMMA. Independently controllable/dimmable direct and indirect light - either by DALI or SwitchDim.

Dimensions: 930 x 251 x 102 mm
 Luminaire input power: 56.5 W
 Luminaire luminous flux: 6500 lm
 Luminaire efficacy: 115 lm/W
 Weight: 7.8 kg



TLG_CAVE_F_P2_ON_1700.jpg

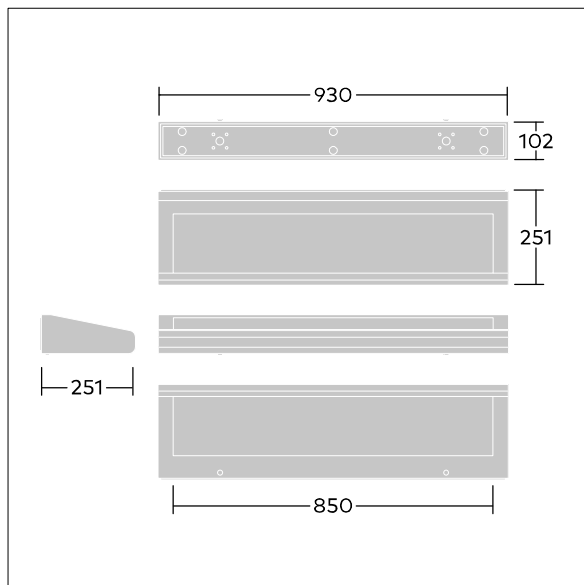

TLG_CAVE_M_LED.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Cavell

96635589 CAVELL 6600 840 HFIX L950

THORN