



### Graffiti


LED spotlight for CONTUS continuous-row systems with spot light distribution and stabilized color temperature. control gear. Class II electrical (this product is not earthed), IP20. Luminaire with CONTUS adapter for simple, rapid mounting of luminaire to CONTUS continuous-row systems. Body: die-cast aluminium white micro-textured paint. Reflector: PC sputtered. Spotlight rotatable through 337° and pivotable through 90°. Complete with 4000K LED, maximum efficiency

This article is single packed article and can also be ordered bulk packed.

Dimensions: Ø95 x 204 mm  
 Luminaire input power: 27 W  
 Luminaire luminous flux: 3500 lm  
 Luminaire efficacy: 130 lm/W  
 Weight: 0.85 kg



TLG\_GRAF\_F\_CONT\_WH\_ON.jpg

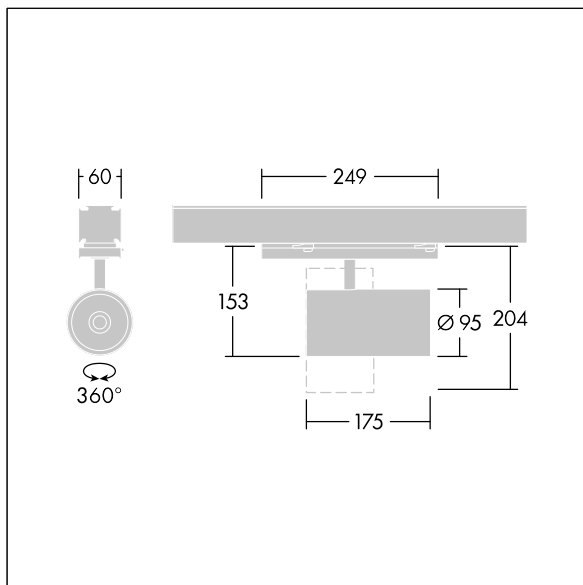

TLG\_GRAF\_M\_CONTUS.wmf

This product contains a light source of energy efficiency class C.

**Graffiti**

**96108780 GRAFFITI 3600-940HE SWI CONT SP WH**

**THORN**