

D-CO LED Bollard

THORN

96262145 D-CO LED BOLLARD 1000 30L50 840 CL1

ISO 9223 C3	IP65	IK10	⊕	CE	⚡	⚙️	⊗	T _a 50	
----------------	------	------	---	----	---	----	---	-------------------	--


D-CO LED Bollard

A timeless LED bollard. Electronic, fixed output control gear. Class I electrical, IP65. Top and body: aluminium powder coated grey 900. Diffuser: semi-opal anti-UV polycarbonate. Suitable for flange mounting or with root spike (available separately). Complete with 4000K LED

Dimensions: Ø150 x 1000 mm
Luminaire input power: 14 W
Weight: 5.45 kg



TLG_DCOL_F_LEDBOLLARDLIT.jpg

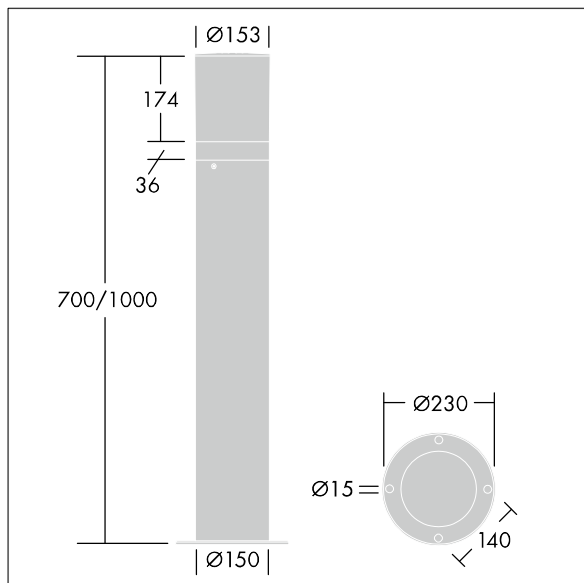

TLG_DCOB_M_BOL.wmf

This product contains a light source of energy efficiency class F.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

D-CO LED Bollard

96262145 D-CO LED BOLLARD 1000 30L50 840 CL1

THORN