

# Linn

# THORN

## 96262137 LINN RCT LED 6L50 732 CL GL

IP65	IK10			850 °C	T <sub>a</sub> 35
------	------	---	---	--------	-------------------

### Linn

A rectangular, Recessed LED luminaire for pathway lighting applications. Electronic, fixed output control gear. Class I electrical, IP65, IK10. Body: die-cast aluminium, painted dark grey (Akzo Nobel 900). Glass: tempered glass, 8mm thick. Recessed housing (required, to be ordered separately): polypropylene. Complete with 3200K LED

Supplied complete with clear glass frame.


Dimensions: 102 x 229 x 91 mm

Luminaire input power: 11.3 W

Weight: 1.05 kg



TLG\_LINN\_F\_RCTPROFLEDPDB.jpg

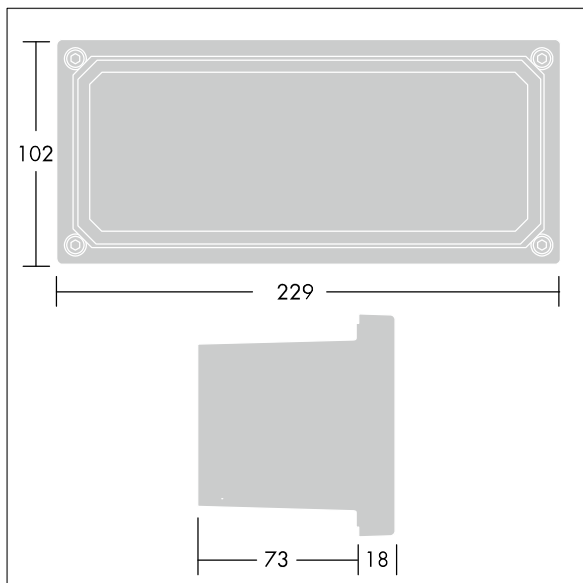

TLG\_LINN\_M\_LDRCTGL.wmf

This product contains a light source of energy efficiency class E.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Linn**

**96262137 LINN RCT LED 6L50 732 CL GL**

**THORN**