

## 96642773 LYRIC DECO LED1050-830 HF MSU OP




A stylish, curving tubular suspended LED luminaire with fixed output control gear. Class I electrical, IP20. Diffuser: opal glass. Complete with 3000K LED.

Dimensions: Ø200 x 300 mm  
 Luminaire input power: 18 W  
 Luminaire luminous flux: 1050 lm  
 Luminaire efficacy: 58 lm/W  
 Weight: 2.2 kg



TLG\_LYRD\_F\_SUSPPDB.jpg

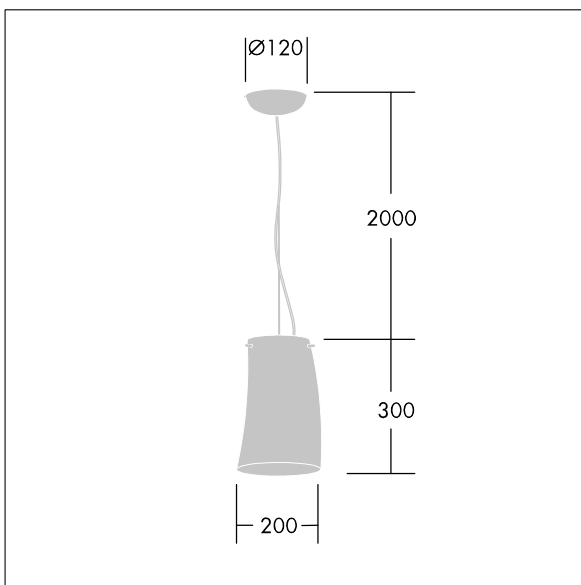

TLG\_LYRD\_M\_SOSP.wmf

This product contains a light source of energy efficiency class E.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.