

ISO 9223 C5	IP66	IK10					T <sub>a</sub> 25	T <sub>a</sub> 50	
----------------	------	------	--	--	--	--	-------------------	-------------------	--

### Thor Bollard


An elegant vandal resistant radially symmetric slim bollard with high performance optic. For Electronic, fixed output control gear. IP66 Electrical Class I. Column and Base: aluminium (EW AW 6060). Canopy: die-cast aluminium (EN AC 44300). Diffuser: Clear anti UV polycarbonate. Gear Box: polycarbonate. Canopy and Column colour: powder coated anthracite (close to RAL7043) (close to RAL7043). Equipped with 50% power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. It can be deactivated at installation with an easily accessible internal switch. Ready to install prewired luminaire. Connection box required, to be ordered separately. Complete with 3000K LED

Flange mounting: 4 x anchor bolts M14 (to be ordered separately), spacing: 150mm

Dimensions: 160 x 160 x 1017 mm  
Luminaire input power: 11.8 W  
Weight: 7.7 kg



TLG\_ADLB\_F\_SLIM.jpg

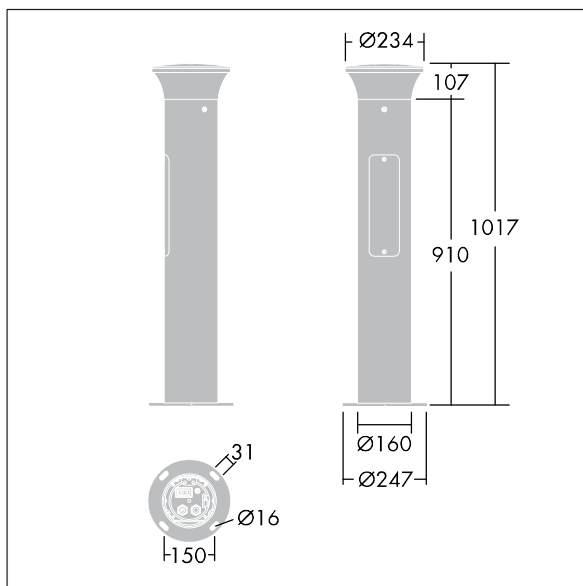

TLG\_ADLB\_M\_SLIM.wmf

This product contains a light source of energy efficiency class D.

**Thor Bollard**

**96273272 TR B S 10L35 BPSW 730 R/S CL1 MPL**

**THORN**