

96643899 TR 48L50-740 SC BP CL1 OP W9 T60E

ISO 9223 C5	IP66	IK08					T <sub>a</sub> 0 +25
----------------	------	------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-------------------------


## Thor

A large size, smart urban LED lantern with 48 LEDs driven at 500mA with Street & Comfort optic and UV stabilised polycarbonate dome with opal finish. Class I electrical, IP66, IK08. Body, bracket and ring: die-cast aluminium (AS12U, LM6 equivalent, EN AC-44300) treated against corrosion, powder coated anthracite (close to RAL7043). Enclosure: 4mm toughened flat glass. Screws and closing set: stainless steel. Pre-wired with 9m cable. Post top mounting to Ø60mm column, tilt 0°, adjustable from -15° to +10°. Equipped with power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. Complete with 4000K LED.

Dimensions: Ø577 x 155 mm  
 Luminaire input power: 79 W  
 Luminaire luminous flux: 10644 lm  
 Luminaire efficacy: 135 lm/W  
 Weight: 14.2 kg  
 Scx: 0.044 m<sup>2</sup>



TLG\_THRL\_F\_MTPOP0.jpg

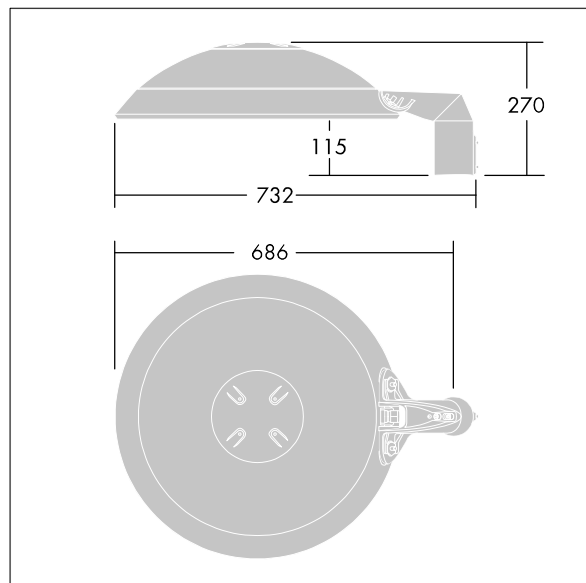

TLG\_THOR\_M\_PTOP.wmf

This product contains light sources of energy efficiency class D.

**Thor**

**96643899 TR 48L50-740 SC BP CL1 OP W9 T60E**

**THORN**