

# Arena Symphony

THORN

96645121 ARENA LED6500-840 HF E3TX TW WL6 EDP

|      |      |   |   |   |   |       |                         |
|------|------|---|---|---|---|-------|-------------------------|
| IP20 | IK03 |  |  |  |  | 650°C | T <sub>a</sub> 0<br>+25 |
|------|------|---|---|---|---|-------|-------------------------|


## Arena Symphony

A suspended architectural raft, incorporating a direct/indirect LED luminaire. Electronic, fixed output control gear with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Class I electrical, IP20. Raft and luminaire frame: aluminium. Optic: curved acrylic. Supplied with a 6 pole Wieland plug on 3.4m of 6 core cable and a panel mounted 6 pole Wieland socket for through wiring. Supplied with suspension wires. Complete with 4000K LED.

Dimensions: 2200 x 850 x 135 mm  
Luminaire input power: 54.9 W  
Luminaire luminous flux: 6500 lm  
Luminaire efficacy: 118 lm/W  
Weight: 23.2 kg



TLG\_ARNS\_F\_EDP.jpg

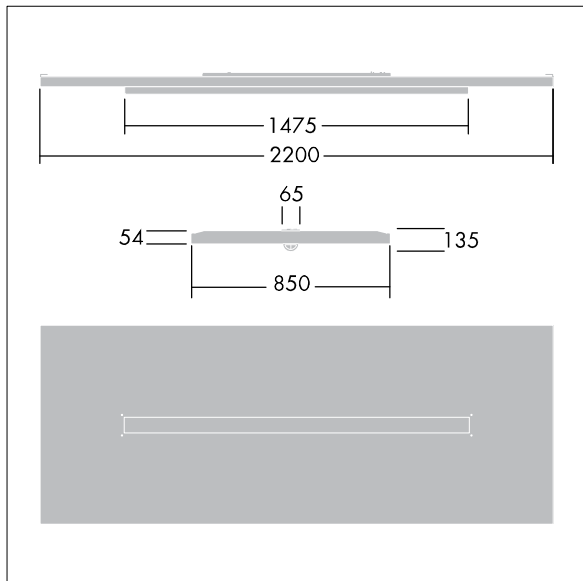

TLG\_ARNS\_M\_LD2.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting