

## 92900292 IQ WAVE LED3100-840 HF MWS Q597 MRE

↓ IP20 ↑ IP44	IK03	⊕	CE	⚡	☀	650°C	T <sub>a</sub> -20 +25	
------------------	------	---	----	---	---	-------	---------------------------	--


### IQ Wave

Recessed modular, direct LED luminaire. Electronic, fixed output control gear. Class I electrical, IP44\_IP20, IK03. Body: highly reflective steel. Frame and end caps: polycarbonate. Diffuser: polycarbonate with aluminium heatsink. Gear tray: powder coated white steel. Suitable for lay in or pull up (with accessory) installation. With integral motion sensor for on/off control. Complete with 4000K LED

Dimensions: 597 x 597 x 97 mm  
Luminaire input power: 30 W  
Luminaire luminous flux: 3200 lm  
Luminaire efficacy: 107 lm/W  
Weight: 3.8 kg



TLG\_IQWV\_F\_PDB.jpg

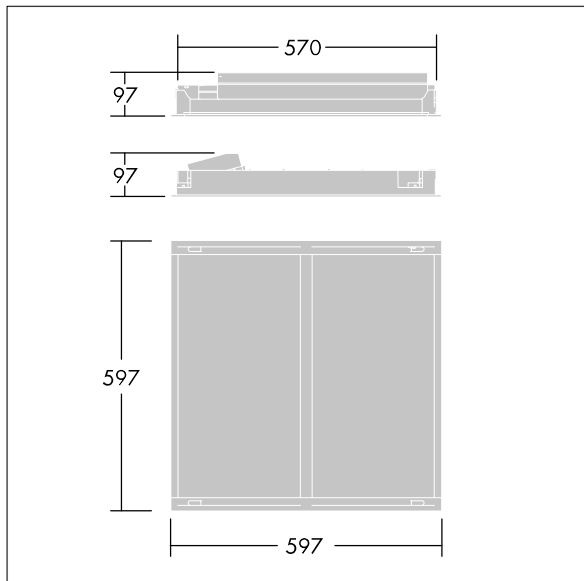

TLG\_IQWV\_M\_600.wmf

This product contains a light source of energy efficiency class D.

**IQ Wave**

**92900292 IQ WAVE LED3100-840 HF MWS Q597 MRE**

**THORN**