

# IQ Wave

# THORN

92900341 IQ WAVE LED4100-830 HFIX E3TX Q597 MRE

	IK03					650°C	$T_a$ 0 +25
---	------	---	---	---	---	-------	----------------


## IQ Wave

Recessed modular, direct LED luminaire. Electronic, DALI dimmable control gear with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Class I electrical, IP44\_IP20, IK03. Body: highly reflective steel. Frame and end caps: polycarbonate. Diffuser: polycarbonate with aluminium heatsink. Gear tray: powder coated white steel. Suitable for lay in or pull up (with accessory) installation. Complete with 3000K LED

Dimensions: 597 x 597 x 97 mm  
Luminaire input power: 40 W  
Luminaire luminous flux: 4050 lm  
Luminaire efficacy: 101 lm/W  
Weight: 4.4 kg



TLG\_IQWV\_F\_PDB.jpg

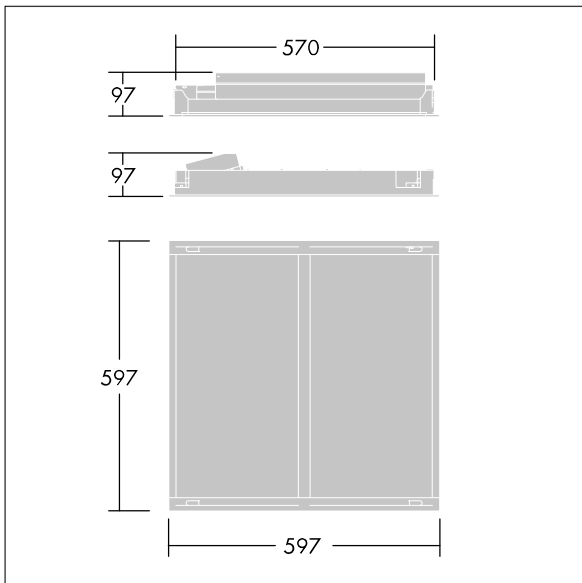

TLG\_IQWV\_M\_600.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# **IQ Wave**

**92900341 IQ WAVE LED4100-830 HFIX E3TX Q597 MRE**

**THORN**