

Alumet Stage II

96275325 ALUMET ST HEAD 4X70 CLRMIX HFX CL1 W4M

THORN

ISO 9223 C3	IP66	IK10	⏏	CE	⚡	⚡	⚡
----------------	------	------	---	----	---	---	---

Alumet Stage II

Head of the architectural lighting column Alumet Stage II, with Electronic, DALI dimmable control gear for 4 x LED spots. Diffuser: UV resistant polycarbonate with anti graffiti varnish. Top cap, base and spot frames made of die-cast aluminium. Spine: steel. Pre-wired with 4m cable. Class I electrical, 220/240V, IK10, IP66. To be mounted on an Alumet column. Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode. Lamps to be ordered separately.

Height: 1250mm


Luminaire input power: 36 W

Weight: 9.2 kg

Windage: 0.079m²



TLG_ALS2_F_HEAD_4C.jpg

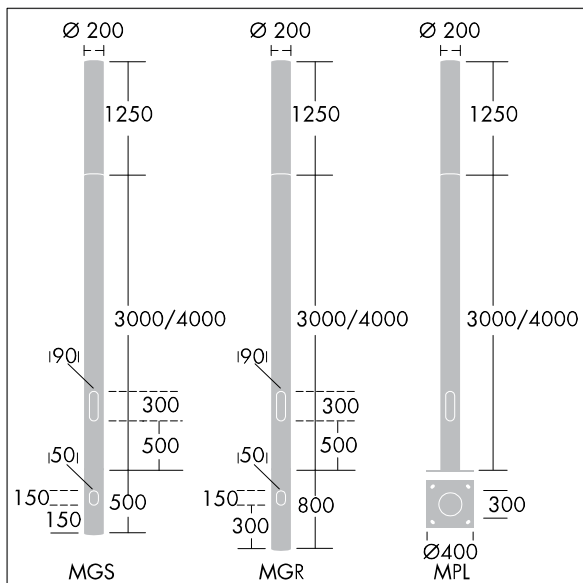

TLG_ALUM_M_2LD1.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting