


# Voyager Twinspot

THORN

96629825 VOYAGER TWIN SPOT MSW E3X-NM WH




## Voyager Twinspot

Durable light weight IP65 LED twin spotlight emergency luminaire lighting, turnable and tiltable LED light heads for optimum adaption for any application, self-contained luminaire, Luminaire with local battery supply for 3 hr central monitoring via DALI; non-maintained mode; display of luminaire status via status LED; housing made of polycarbonate white; wall surface-mounted luminaire; Screw mounting of the IP65 cover; luminaire easy to install; Quick fit terminal block, through wiring possible up to 2,5 mm<sup>2</sup>; suitable for indoor use; Units should be mounted at least 30° above line of sight; Maintenance free 4.8V NiCd battery, 24 hour recharge period; Power supply: 220/240 V AC; degree of protection: IP65, class of protection: Class I electrical; Dimensions: 87 x 280 x 300 mm; Luminaire input power: 2.8 W; weight: 1.7 kg



TLG\_VOYT\_F\_PDB.jpg

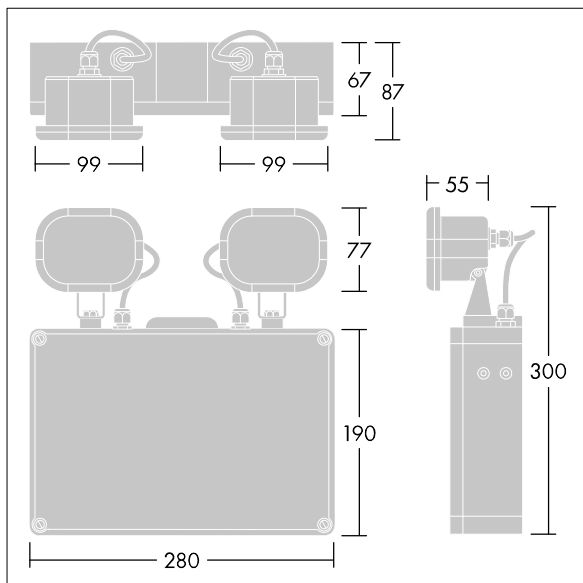

TLG\_VOYT\_M\_LD1.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting