








## 96631303 KAT RD 1000-830 HF

		IP65		IK10				850°C		T <sub>a</sub> -15 +35
---	---	------	---	------	---	---	---	-------	---	---------------------------


### Katona

A very slim, round functional LED luminaire. Fixed output LED driver. Body: polycarbonate. Diffuser: opal polycarbonate. Class II electrical, IP65, IK10. Complete with 3000K LED. Suitable for direct mounting to wall or ceiling. Loop-in, loop-out is possible for cables up to 2.5mm<sup>2</sup>. BESA compatible.

Dimensions: Ø307 x 58 mm  
Luminaire input power: 8.3 W  
Luminaire luminous flux: 950 lm  
Luminaire efficacy: 114 lm/W  
Weight: 0.94 kg



TLG\_KATO\_F\_RD\_PDB.jpg

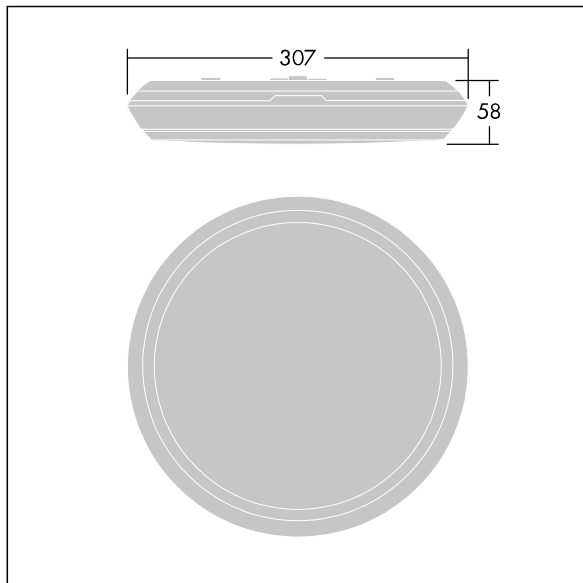

TLG\_KATO\_M\_RD\_LDS.wmf

This product contains a light source of energy efficiency class D.

**Katona**

**96631303 KAT RD 1000-830 HF**

THORN