

	IP65		IK10						850°C		T _a -15 +35
---	------	---	------	---	---	---	---	---	-------	---	---------------------------

Katona


A very slim, round bulkhead LED luminaire. LED driver
Wireless controlled via App with Bluetooth® 4.x - basicDIM
Wireless. Luminaire arrangement: Mobile control to
luminaire max. 6m, luminaire to luminaire max. 4m. Body:
polycarbonate. Diffuser: opal polycarbonate. Class II
electrical, IP65, IK10. Complete with 4000K LED. Suitable
for direct mounting to wall or ceiling. Loop-in, loop-out is
possible for cables up to 2.5mm².

Radio definition: basicDIM Wireless - Bluetooth® 4.x,
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm

Dimensions: Ø307 x 58 mm
Luminaire input power: 11.7 W
Luminaire luminous flux: 1400 lm
Luminaire efficacy: 120 lm/W
Weight: 1.09 kg



TLG_KATO_F_RD_PDB.jpg

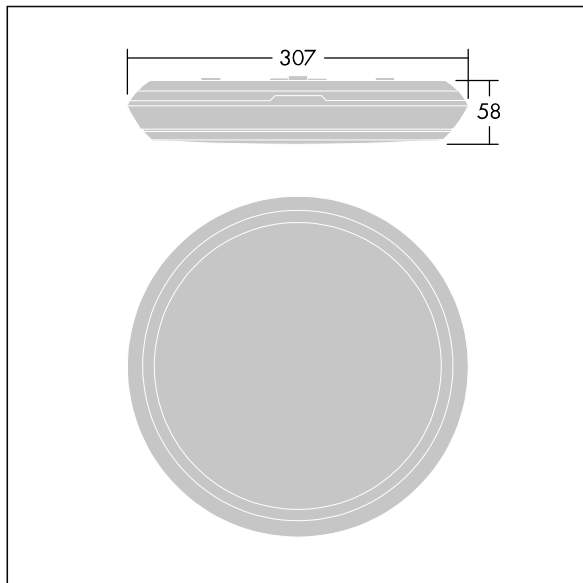

TLG_KATO_M_RD_LDS.wmf

This product contains a light source of energy efficiency class C.

Katona

96631387 KAT RD 1400-840 BC

THORN