

# PopPack

# THORN

## 96631571 POPPACK LED 11000-840 HF E3 L1800

|      |      |   |    |  |  |       |                         |
|------|------|---|----|--|--|-------|-------------------------|
| IP20 | IK03 | ⊕ | CE |  |  | 650°C | T <sub>a</sub> 0<br>+25 |
|------|------|---|----|--|--|-------|-------------------------|


### PopPack

Batten LED luminaire. Electronic, fixed output control gear with 3 hour, manual test, emergency lighting circuit. Body: coated, formed steel, white (RAL9016). End caps: injection moulded polycarbonate, white. Diffuser: textured opal acrylic. Electrical connection via (3 + 3) x 2 x 2.5mm<sup>2</sup> terminal block. Complete with 4000K LED

Dimensions: 1728 x 60 x 74 mm  
Luminaire input power: 74.1 W  
Luminaire luminous flux: 10900 lm  
Luminaire efficacy: 147 lm/W  
Weight: 2.5 kg



TLG\_POPL\_F\_PDB\_EMPTY.jpg

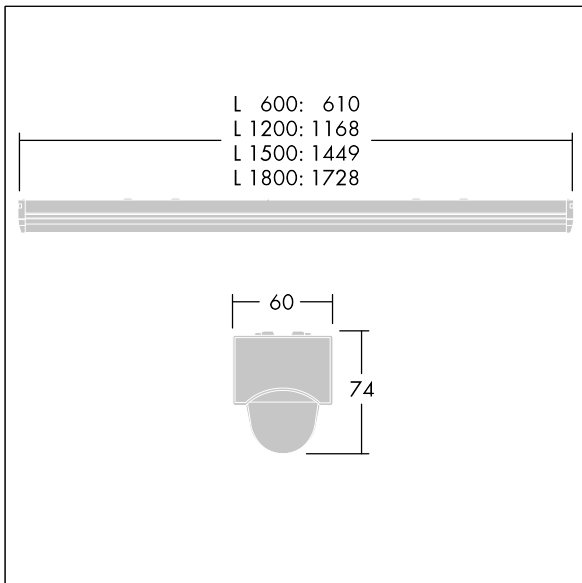

TLG\_POPL\_M\_LD1.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**PopPack**

**96631571 POPPACK LED 11000-840 HF E3 L1800**

**THORN**