

# PopPack

# THORN

## 96631581 POPPACK LED 3000-840 PIR L1200

IP20	IK03	⊕	CE			650°C	T <sub>a</sub> -20 +25
------	------	---	----	---	---	-------	---------------------------


### PopPack

Batten LED luminaire with detachable LED engine.  
Electronic, fixed output control gear. Body: coated, formed steel, white (RAL9016). End caps: injection moulded polycarbonate, white. Diffuser: textured opal acrylic.  
Electrical connection via 2 x (3 x 2 x 2.5mm<sup>2</sup>) terminal blocks. Including pre-wired PIR sensor with switch ON/OFF functionality. Enabled control of slave luminaire from one master luminaire equipped with PIR sensor by means of hard wiring. 3 core wiring sufficient for the through wiring of the products, max. load per circuit = 2A. Complete with 4000K LED.

Dimensions: 1168 x 60 x 74 mm  
Luminaire input power: 23.9 W  
Luminaire luminous flux: 3350 lm  
Luminaire efficacy: 140 lm/W  
Weight: 1.4 kg



TLG\_POPL\_F\_PDB\_SENS.jpg

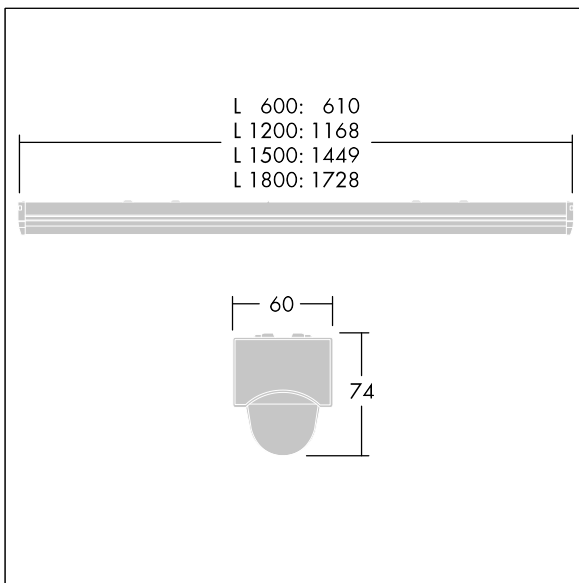

TLG\_POPL\_M\_LD1.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**PopPack**

**96631581 POPPACK LED 3000-840 PIR L1200**

**THORN**