

PopPack

THORN


96631589 POPPACK LED 11000-840 PIR L1800

| | | | | | | | |
|------|------|--|--|--|--|-------|---------------------------|
| IP20 | IK03 | | | | | 650°C | T _a -20 +25 |
|------|------|--|--|--|--|-------|---------------------------|


PopPack

Batten LED luminaire with detachable LED engine.
Electronic, fixed output control gear. Body: coated, formed steel, white (RAL9016). End caps: injection moulded polycarbonate, white. Diffuser: textured opal acrylic.
Electrical connection via 2 x (3 x 2 x 2.5mm²) terminal blocks. Including pre-wired PIR sensor with switch ON/OFF functionality. Enabled control of slave luminaire from one master luminaire equipped with PIR sensor by means of hard wiring. 3 core wiring sufficient for the through wiring of the products, max. load per circuit = 2A. Complete with 4000K LED.

Dimensions: 1728 x 60 x 74 mm
Luminaire input power: 74.1 W
Luminaire luminous flux: 10900 lm
Luminaire efficacy: 147 lm/W
Weight: 1.8 kg

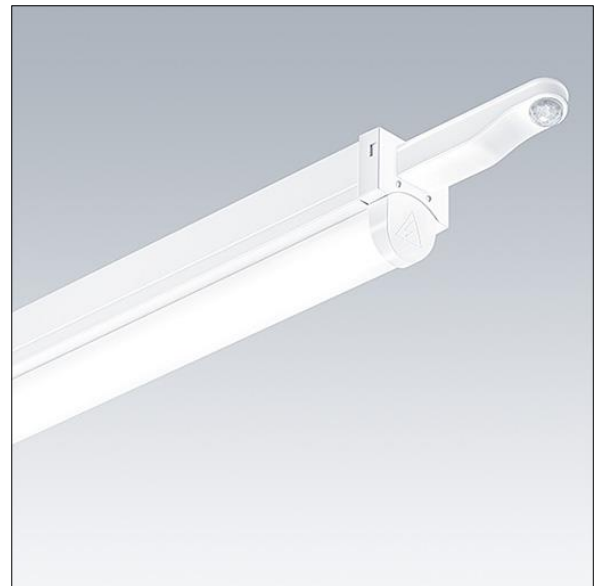

TLG_POPL_F_PDB_SENS.jpg

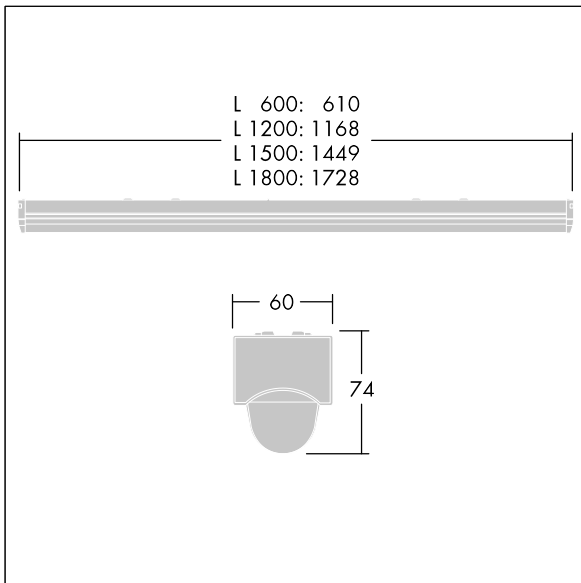

TLG_POPL_M_LD1.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

PopPack

96631589 POPPACK LED 11000-840 PIR L1800

THORN