

# IQ Wave

# THORN

92903173 IQ WAVE LED4100-840 BC E3 Q597 MRE

↓ IP20 ↑ IP44	IK03	⊕	CE	⚙️	⚙️	650°C	T <sub>a</sub> 0 +25	
------------------	------	---	----	----	----	-------	-------------------------	--

## IQ Wave


Recessed modular, direct LED luminaire. Electronic, dimmable control gear, Wireless controlled via App with Bluetooth® 4.x - basicDIM Wireless, (installation in metal ceilings not allowed). Luminaire arrangement: Mobile control to luminaire max. 15 m, luminaire to luminaire max. 4 m (centre). Class I electrical, IP44\_IP20, IK03. Body: highly reflective steel. Frame and end caps: polycarbonate. Diffuser: polycarbonate with aluminium heatsink. Gear tray: powder coated white steel. Suitable for lay in or pull up (with accessory) installation. Complete with 4000K LED

Radio definition: basicDIM Wireless - Bluetooth® 4.x,  
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 597 x 597 x 97 mm  
Luminaire input power: 40 W  
Luminaire luminous flux: 4250 lm  
Luminaire efficacy: 106 lm/W  
Weight: 4.4 kg



TLG\_IQWV\_F\_PDBCEILING.jpg

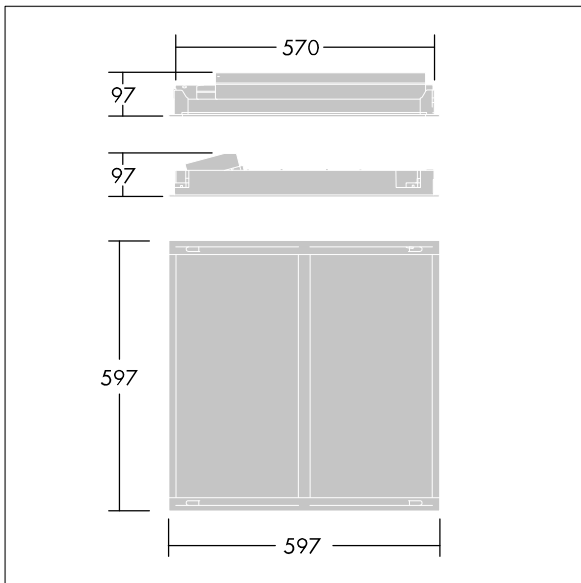

TLG\_IQWV\_M\_600.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**IQ Wave**

**92903173 IQ WAVE LED4100-840 BC E3 Q597 MRE**

**THORN**