


## 96632490 KAT RD SE 1800-840 MWS E3

	IP66		IK10				850°C		T <sub>a</sub> 0 +25
---	------	---	------	---	---	---	-------	---	-------------------------


### Katona

A round functional LED luminaire with deep body for side entry wiring capability, can be used with up to Ø20mm surface mounted conduit. Fixed output LED driver with 3 hour, manual test, emergency lighting circuit. Body: polycarbonate. Diffuser: opal polycarbonate. Class II electrical, IP66, IK10. With integral motion sensor for on/off control. Complete with 4000K LED. Suitable for direct mounting to wall or ceiling. Loop-in, loop-out is possible for cables up to 2.5mm². BESA compatible.

Dimensions: Ø328 x 84 mm  
 Luminaire input power: 16.3 W  
 Luminaire luminous flux: 1750 lm  
 Luminaire efficacy: 107 lm/W  
 Weight: 0.19 kg

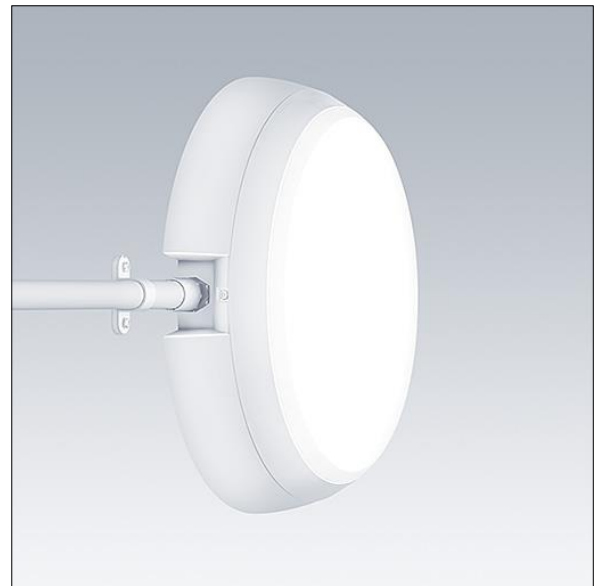

TLG\_KATO\_F\_RD\_deep\_PDB.jpg

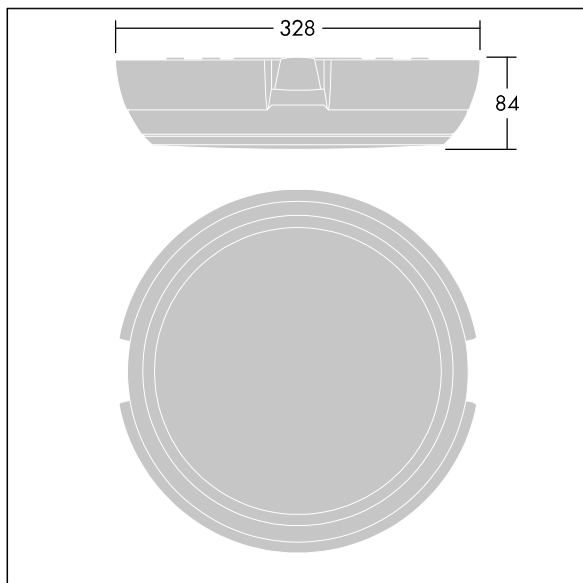

TLG\_KATO\_M\_RD\_FRAME\_LDS.wmf

This product contains a light source of energy efficiency class C.

**Katona**

**96632490 KAT RD SE 1800-840 MWS E3**

**THORN**