

# IQ Wave SP

THORN

92910501 IQ SURF L LED6700-840 BC E3-C WH


IP40	IK05					650°C	T <sub>a</sub> 0 +25
------	------	--	--	--	--	-------	-------------------------

## IQ Wave SP

A lightweight, Surface mounted, LED luminaire with MV Tech optic. Electronic, dimmable control gear, Wireless controlled via App with Bluetooth® 4.x - basicDIM Wireless with 3 hour, manual test, emergency lighting circuit. Class I electrical, IP40, IK05. Body, diffuser, frame and endcaps: polycarbonate finished in white (close to RAL9016). Gear tray: pre-coated steel. Cable entry only possible via central hole. Complete with 4000K LED

Radio definition: basicDIM Wireless - Bluetooth® 4.x,  
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 1440 x 210 x 70 mm  
Luminaire input power: 61 W  
Luminaire luminous flux: 6700 lm  
Luminaire efficacy: 110 lm/W  
weight: 5.7 kg

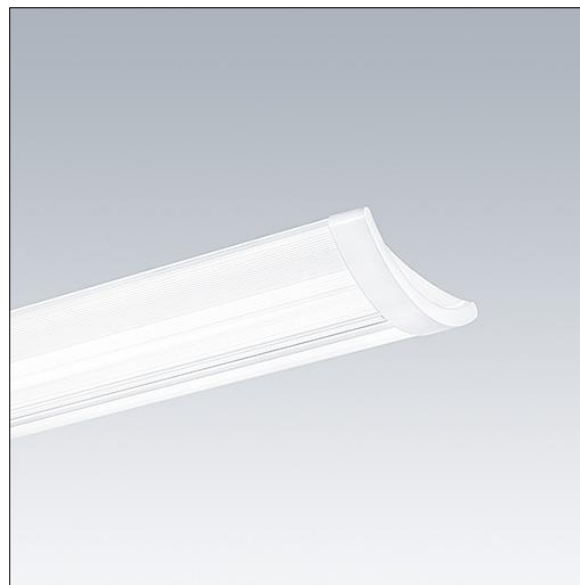

TLG\_IQSU\_F\_SUP\_PDB.jpg



TLG\_IQSU\_M\_SUR.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# **IQ Wave SP**

**92910501 IQ SURF L LED6700-840 BC E3-C WH**

**THORN**