

## Beta 2

THORN

### 96633220 BETA 2 LED3800-830 HFIX OP IP65 Q600




#### Beta 2

A square ceiling recessed LED luminaire with a 14mm profile. DALI dimmable LED driver. Class II electrical (this product is not earthed), IP65, IK06. Body: steel sheet, white (close to RAL9016). Diffuser: opal. Complete with 3000K LED.

Dimensions: 596 x 596 x 14 mm  
Luminaire input power: 33 W  
Luminaire luminous flux: 3600 lm  
Luminaire efficacy: 109 lm/W  
Weight: 4.2 kg



TLG\_BET2\_F\_MREQ.jpg

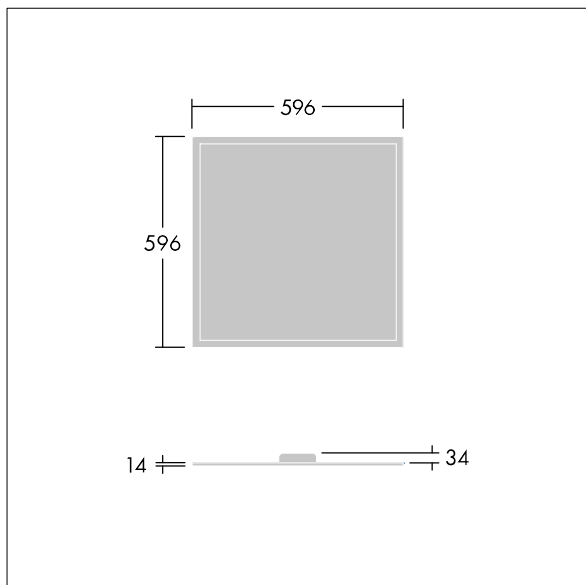

TLG\_BET2\_M\_Q596.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Beta 2**

**96633220 BETA 2 LED3800-830 HFIX OP IP65 Q600**

THORN