


# Voyager Star

96633239 VOYAGER STAR P MSC ESC ECD SR

THORN




## Voyager Star

High performance, surface mounted LED emergency lighting luminaire, with optic.. Housing: aluminium die casting alloy, powder coated silver grey (close to RAL 9006). Gear tray: galvanised steel sheet. Lens: polycarbonate. IP40,. Luminaire can be installed quickly and maintained without tools. Electrical connection (230VAC) via maximum 2.5mm<sup>2</sup> cable, loop in - loop out possible. Optimum thermal management via heat sink. Complete with LEDs..

Luminaire input power: 3.7 W  
Dimensions: 146 x 146 x 34 mm  
Weight: 0.65 kg



TLG\_VSTR\_F\_MSC\_side\_ECx\_ESC\_SR.jpg

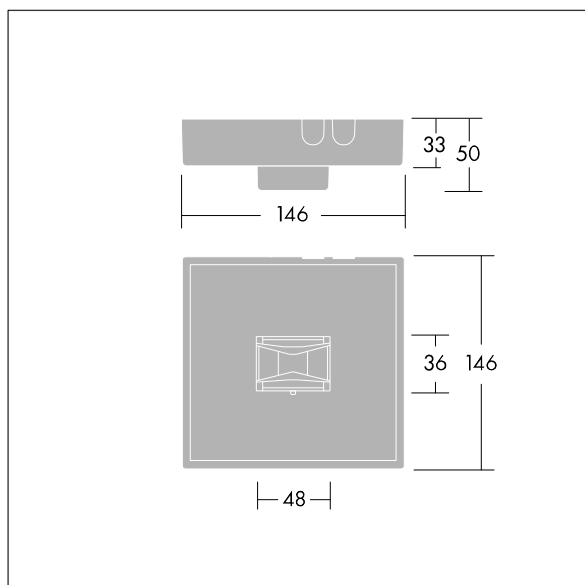

TLG\_VYLD\_M\_MCE ROUTE.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# Voyager Star

96633239 VOYAGER STAR P MSC ESC ECD SR

THORN