

96633062 DUROLIGHT-S 5200-840 HF L1650

IP65	IK10					850°C		170Nm	T _a -25 +50
------	------	--	--	--	--	-------	--	-------	---------------------------


Durolight

Anti-vandal Surface mounted LED luminaire. Electronic, fixed output control gear. IP65, IK10, Class I electrical. Body: 2mm steel sheet painted white (close to RAL9016). Gasket: non-ageing polyurethane foam. Diffuser: 3mm thick polycarbonate with outstanding impact resistance, connected and secured with tamper-resistant stainless steel twin hole screws to the body. Complete with 4000K LED

Dimensions: 1650 x 290 x 66 mm
Luminaire input power: 46.7 W
Luminaire luminous flux: 5210 lm
Luminaire efficacy: 112 lm/W
Weight: 18 kg



TLG_DURO_F_MCE.jpg

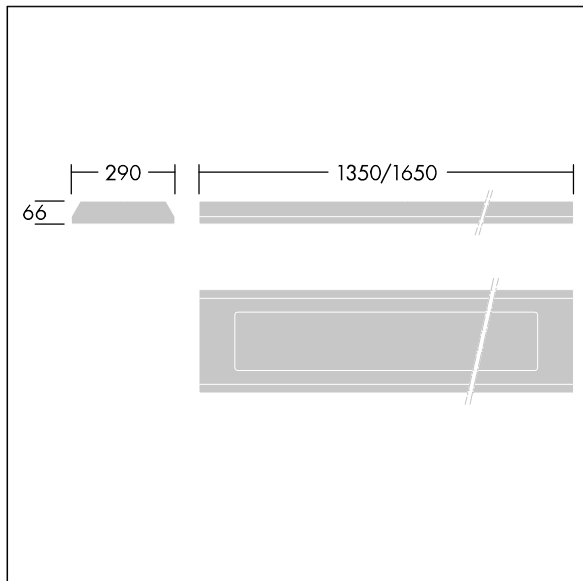

TLG_DURO_M_LDS.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Durolight

96633062 DUROLIGHT-S 5200-840 HF L1650

THORN