








96633074 DUROLIGHT-C 4500-840 HF L1515

| | | | | | | | | | | | |
|------|------|---|---|---|---|---|-------|---|-------|---|---------------------------|
| IP65 | IK10 |  |  |  |  |  | 850°C |  | 170Nm |  | T _a -25 +45 |
|------|------|---|---|---|---|---|-------|---|-------|---|---------------------------|


Durolight

Anti-vandal Surface mounted cornice LED luminaire.
Electronic, fixed output control gear. IP65, IK10, Class I electrical. Body: 2mm steel sheet painted white (close to RAL9016). Gasket: non-ageing polyurethane foam. Diffuser: 3mm thick polycarbonate with outstanding impact resistance, connected and secured with tamper-resistant stainless steel twin hole screws to the body. Complete with 4000K LED

Dimensions: 1515 x 175 x 175 mm
Luminaire input power: 46.7 W
Luminaire luminous flux: 4497 lm
Luminaire efficacy: 96 lm/W
Weight: 13 kg



TLG_DURO_F_CORNER.jpg

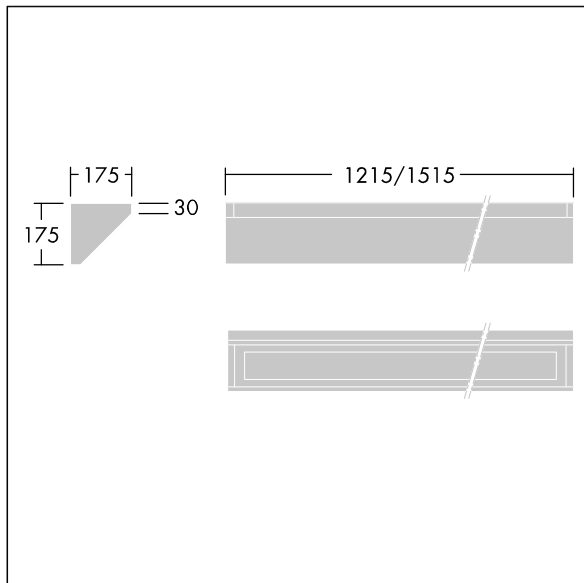

TLG_DURO_M_LDC.wmf

This product contains a light source of energy efficiency class C.

Durolight

96633074 DUROLIGHT-C 4500-840 HF L1515

THORN