

## 96633081 DUROLIGHT-C 3600-840 HF E3 L1215

|      |      |  |  |  |  |       |  |       |                           |
|------|------|--|--|--|--|-------|--|-------|---------------------------|
| IP65 | IK10 |  |  |  |  | 850°C |  | 170Nm | T <sub>a</sub> -25<br>+45 |
|------|------|--|--|--|--|-------|--|-------|---------------------------|


### Durolight

Anti-vandal Surface mounted cornice LED luminaire.  
Electronic, fixed output control gear with 3 hour, manual test, emergency lighting circuit. IP65, IK10, Class I electrical. Body: 2mm steel sheet painted white (close to RAL9016). Gasket: non-ageing polyurethane foam. Diffuser: 3mm thick polycarbonate with outstanding impact resistance, connected and secured with tamper-resistant stainless steel twin hole screws to the body. Complete with 4000K LED

Dimensions: 1215 x 175 x 175 mm  
Luminaire input power: 38 W  
Luminaire luminous flux: 3589 lm  
Luminaire efficacy: 94 lm/W  
Weight: 11 kg



TLG\_DURO\_F\_CORNER.jpg

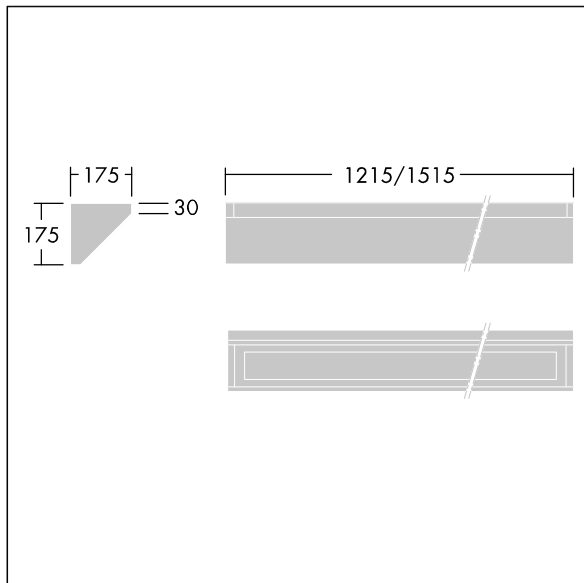

TLG\_DURO\_M\_LDC.wmf

This product contains a light source of energy efficiency class C.

**Durolight**

**96633081 DUROLIGHT-C 3600-840 HF E3 L1215**

**THORN**